AD-A048 110   DAVID W TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CE--ETC F/G 20/4
PARAMETRIC TRANSONIC EVALUATION OF TYPE A VSTOL NACELLE DRAG.(U)
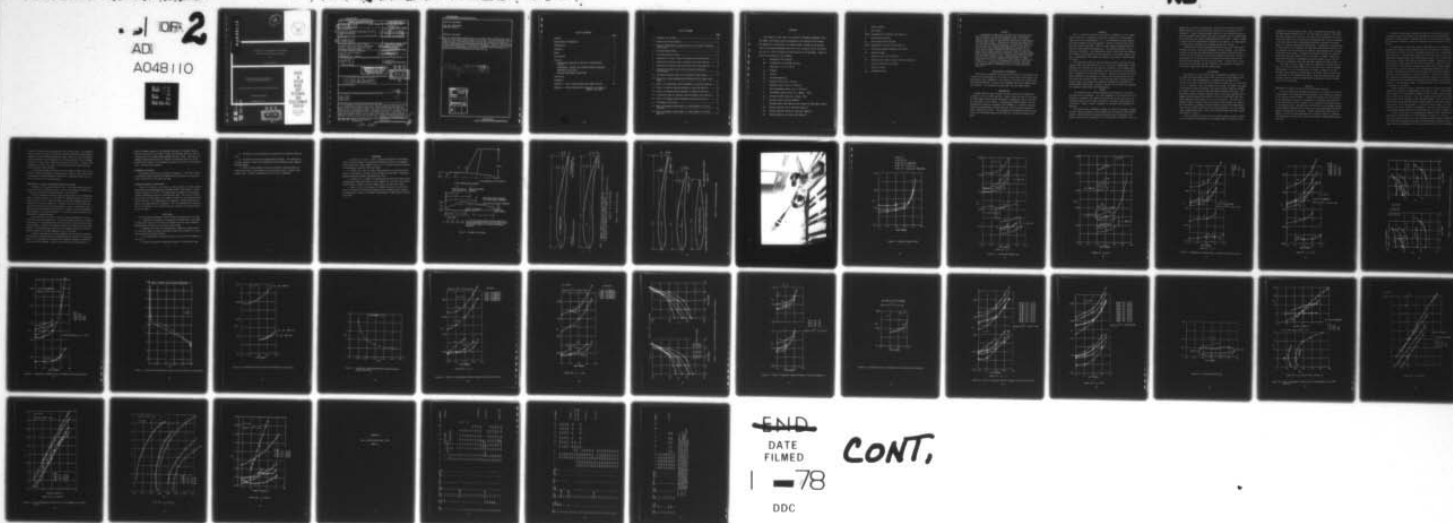SEP 77 J OTTENSOSER
UNCLASSIFIED   DTNSRDC/ASED-390   NL

OF 2
ADi
A048110

END
DATE
FILMED
1 —78
DDC

CONT,

DEPARTMENT OF THE NAVY

DTNSRDC

PARAMETRIC TRANSONIC EVALUATION

OF TYPE A VSTOL NACELLE DRAG

by

Jonah Ottensoser

APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION UNLIMITED

AVIATION AND SURFACE EFFECTS DEPARTMENT

DTNSRDC ASED-390

September 1977

DDC

RECEIVED

JAN 4 1978

B

DAVID
W.
TAYLOR
NAVAL
SHIP
RESEARCH
AND
DEVELOPMENT
CENTER

BETHESDA
MARYLAND
20084

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER DTNSRDC ASED-390	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER (rept.)
4. TITLE (and Subtitle) PARAMETRIC TRANSONIC EVALUATION OF TYPE A VSTOL NACELLE DRAG		5. TYPE OF REPORT & PERIOD COVERED Final Jan - Aug 1977
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Jonah Ottensoser		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Aviation and Surface Effects Department David W. Taylor Naval Ship R&D Center Bethesda, Maryland 20084		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Element 63258N Project W0590-SL (Continued on reverse side)
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command Code PMA 269 Washington, D.C. 20361		12. REPORT DATE September 1977
		13. NUMBER OF PAGES 46
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office) 47 p.		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

DDC
RECEIVED
JAN 4 1978
B

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

W0590SL006

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Type A VSTOL
Nacelle Drag
Pylon Drag

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

A parametric evaluation of the zero lift drag characteristics attributable to the large nacelles found on some Type A VSTOL candidate aircraft was conducted in the 7- by 10-foot transonic wind tunnel of the David W. Taylor Naval Ship Research and Development Center. Mounting the nacelles in proximity to the wings and fuselage yields levels of interference drag three to four times the isolated drag which results in the nacelle interference drag producing approximately 50 percent of the total aircraft drag. Movement of the nacelles away
(Continued on reverse side)

DD FORM 1473 1 JAN 73   EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

387 695

(Block 10 continued)

Task Area W0590-SL006
Work Unit 1660-870

(Block 20 continued)

from the wings either longitudinally or vertically tends to reduce drag. Except for the nacelles mounted forward of the wing, the nacelles have an adverse effect on lift. The particular wide nose body used proved to be highly unstable longitudinally although adding nacelles above or behind the wings tended to reduce this instability. Five pairs of axisymmetric nacelles, four pairs of pylons, three longitudinal and two vertical positions were investigated on a 10-percent scale, low (supercritical) wing model.

TABLE OF CONTENTS

iii

LIST OF FIGURES

NOTATION

The results in this report are reduced to standard aerodynamic force and moment coefficients and are presented in the stability axis system. All moments are referenced to the balance center located at the quarter chord of the mean aerodynamic chord (27.40 in. (0.696 m) aft of the nose) and 2.25 in. (0.057 m) above the lower surface of the fuselage. Angles of attack are relative to the fuselage.

B	Designation for fuselage
BW	Designation for fuselage and wing
b	Wing span, 4.77 ft (1.45 m)
C_D	Drag/qs
C_L	Lift/qs
C_M	Pitching Moment/qsc
C_P	Pressure coefficient, $(P-P_o)/q$
c	Reference chord, 0.671 ft (0.205 m)
$\bar{c}$	Mean aerodynamic chord, 0.74 ft (0.226 m)
D	Incremental nacelle drag (e.g., $BWP_1N_1 - BWP_1$)
D_o	Isolated nacelle drag (e.g., $BP_4N_1 - BP_4$)
d	Maximum nacelle external diameter
h	Minimum height from nacelle outer surface to wing upper surface
LA	Nacelle position aft of wing (see Figure 1)
LF	Nacelle position forward of wing (see Figure 1)
LW	Nacelle position over wing (see Figure 1)

v

l   Nacelle length

M   Mach number

N1-N5   Designation for nacelles (see Figure 2)

P   Local static pressure

P_o Free-stream static pressure

P1-P4   Designation for pylons (see Figure 2)

q   Free-stream dynamic pressure, psf (N/m^2)

Re   Reynolds number

S   Wing area 3.196 ft^2 (0.2969 m^2)

UW   Raised nacelle position above wing (see Figure 1)

x   Distance along nacelle length

α   Angle of attack

ΔC_D Incremental drag

ABSTRACT

A parametric evaluation of the zero lift drag characteris-
tics attributable to the large nacelles found on some Type A
VSTOL candidate aircraft was conducted in the 7- by 10-foot
transonic wind tunnel of the David W. Taylor Naval Ship Research
and Development Center. Mounting the nacelles in proximity to
the wings and fuselage yields levels of interference drag three
to four times the isolated drag which results in the nacelle
interference drag producing approximately 50 percent of the
total aircraft drag. Movement of the nacelles away from the
wings either longitudinally or vertically tends to reduce drag.
Except for the nacelles mounted forward of the wing, the nacelles
have an adverse effect on lift. The particular wide nose body
used proved to be highly unstable longitudinally, although
adding nacelles above or behind the wings tended to reduce this
instability. Five pairs of axisymmetric nacelles, four pairs
of pylons, and three longitudinal and two vertical positions
were investigated on a 10-percent scale, low (supercritical)
wing model.

ADMINISTRATIVE INFORMATION

INTRODUCTION

NAVAIR 53013 has been involved for some time with the competitive
evaluation of Type A VSTOL aircraft. Some of these aircraft are typified
by large engine nacelles whose drag plays a significant role in the over-
all performance of the vehicle. Consequently, NAVAIR requested that an
experimental program be performed in the DTNSRDC 7- by 10-foot transonic
tunnel to parametrically evaluate the zero lift drag characteristics of
these (unpowered) nacelles. The information thus generated would be used
as part of the NAVAIR empirical data base for the VSTOL evaluation pro-
gram.

1

APPARATUS

The 7- by 10-foot transonic wind tunnel at DTNSRDC is of the closed-circuit type that is capable of continuous operation in a Mach number range from 0.20 to approximately 1.15. A six-component internal balance was used to measure forces and moments. Because of balance load limits, two such balances were used: TSB-6 for most wing-off configurations and TSB-24 for most wing-on configurations. The external geometry of both balances is identical. Each balance was used in conjunction with Adapter 29, Adapter 26, and Sting 4 and then connected to the tunnel support system. A dangleometer was mounted internally to the model to measure angle of attack.

The starboard nacelle of each pair had four static pressure taps 90 degrees apart from each other and 4.5 in. aft of the leading edge. These pressures were recorded on four separate transducers, and although these data were not used in this evaluation, they are included in the tabulated data of Appendix B for potential interest. Separate transducers were also *used to measure cavity pressure* for axial force corrections and for the five total and one static probe in the drag rake used to measure nacelle internal drag. The balance and transducer signals were processed by a Beckman Model 4040C analog to digital converter and recorded and processed on a Hewlett-Packard Model 2100 minicomputer.

MODELS

The 10-percent Type A VSTOL fuselage was constructed of wood with a thin covering of fiberglass. All other components of this model were constructed of aluminum. The inboard 5-percent span of the wing was a conventional unswept airfoil shape followed by a 26-degree sweep supercritical airfoil. Figure 1 shows a schematic of the model with pertinent dimensions.

The nacelles were axisymmetric bodies of revolution mounted on pylons without relative incidence to the fuselage with N1 chosen as the baseline nacelle. Mass flow ratios through the nacelle based on high-lite (entrance) and exit areas averaged 0.53 for nacelles N1, N2 and N3, 0.65 for

2

nacelle N4, and 0.42 for nacelle N5. The pylon was constant chord NACA
64A012 airfoil in cross section with variations in span length for P1
through P4. Figure 2 shows pertinent details of the nacelles and pylons.
Contoured wooden filler blocks were used to smoothly fill in fuselage gaps
as the nacelles were varied longitudinally and vertically. Figure 3 shows
a typical wing-on configuration installed in the tunnel. No longitudinal
or vertical tail surfaces were evaluated during this program.

Transition grit (#120 carborundum particles) was used on the wings,
fuselage, nacelles, and pylons throughout the test program. The location
and size of the grit were determined by the procedure outlined in Ref. 1.
A 1/8-in. (0.32-cm) wide band of grit was placed 10 percent of the fuse-
lage length aft of the nose and at a constant 10-percent chord on the
upper and lower surfaces of the wing and pylons. A similar band of grit
was placed on the inner and outer surfaces of the nacelles 10 percent of
the nacelle length back from the leading edge.

TEST PROGRAM

The majority of the wing-off data, as indicated in Appendix A, were
run under settling chamber vented (SCV) conditions at Mach numbers from
0.50 to 0.85. This corresponds to a dynamic pressure range of 300
(14,364) to 660 psf (31,600 N/m^2) and a Reynolds number per foot variation
of 3 to 4.1 million. With the addition of the wing, the normal front gage
of the balance became overloaded. The initial balance TSB-6 was changed
for TSB-24, and the test was continued under evacuated conditions. The
Mach number range for wing-on data was 0.30 to 0.65 which corresponds to a
dynamic pressure range of 80 (4,070) to 310 psf (14,843 N/m^2) and a Rey-
nolds number per foot variation of 1.3 to 2.3 million. The effect of a
Reynolds number on drag for the two different tunnel conditions, however,
did not present a problem in the data analysis because data compared be-
tween the two tunnel conditions was of the incremental type (e.g., BWN_1P_1
- BWP_1 compared with BN_1P_1 - BP_1) where Reynolds number variation should
have almost no effect.

A wake rake with one static and five total probes was used to survey
the exit plane of the nacelles at zero degrees angle of attack for mea-

3

surement of nacelle internal drag. (Ref. 2 indicates that nacelle internal drag remains constant from -4 to 4 deg angle of attack.) The internal profile drag was so low (i.e., the ratio of total pressure in the nacelle exit plane to the free-stream total pressure was 1.0 over 95 percent of the exit plane) that no measureable difference between the internal drag of the various nacelles was discernible. Consequently, internal drag of these nacelles was assumed to be small and approximately equal for all the nacelles, and no correction for internal drag was applied to the data presented in this report. (Theoretical estimates indicate the internal drag coefficient per nacelle to be on the order of 0.0010. These estimates were obtained by considering the internal wetted area of the nacelles as an equivalent flat plate and then applying the data of Ref. 3.)

The angle of attack range, within the constraints of model fouling, was -4 to 9 deg. for Mach number 0.5 or less and -4 to 4 deg. for higher Mach numbers. For all configurations the angle of sideslip was zero. Fuselage cavity pressure was measured by two probes taped to either side of the sting at the fuselage exit plane. These two pressures were then averaged, and the average was appropriately applied to adjust the axial force to zero base drag.

ANALYSIS

COMPARISON OF NACELLES IN AND OUT OF WING/FUSELAGE VICINITY

The most significant information contained in this report is the tremendous amount of interference drag generated by the nacelles in proximity to the wing as shown in Figure 5. Moving the nacelles into the vicinity of the fuselage, as shown by a comparison of ΔC_D between the nacelles on P1 and the nacelles on P4 in Figure 5, also produces a substantial amount of interference drag. Movement into the vicinity of the fuselage approximately doubled the drag and this drag level is then approximately doubled again in the vicinity of the wing. Nacelle interference drag tends to double or triple the body-wing drag and, as shown in Figure 6, generates even more drag as a very early drag rise develops at Mach numbers greater than 0.50.

4

Incremental drag values presented in Figure 5 are obtained by sub-
tracting the drag of the nacelle-off configuration from the appropriate
nacelle-on configurations. Wing-off data used to obtain these increments
are presented in Figures 7 and 8; the wing-on data are presented in Fig-
ure 6.

An examination of individual nacelle drag (Figure 5), as measured by
mounting the nacelles on the longest pylon with the wings off, indicates
that the basic nacelle (N1) has a reasonable drag level but a surprisingly
early drag rise. Decreasing the high-lite radius by 25 percent (N5) sub-
stantially decreases drag, while shortening the nacelle (N4) or thickening
the external countour (N2) increase drag about equally. Thinning the ex-
ternal contour (N3) relative to the basic nacelle (N1) produces the larg-
est increase in drag but also produces the largest drag rise Mach number.
The high drag level of N3 may be due to leading edge separation on this
nacelle. The theoretical pressure coefficients for N3 are more negative
than for the other nacelles, as shown in Figure 9. The data of Figure 9
were obtained by considering potential flow about nacelle cross sections
in conjunction with the method of conformal transformations as described
in Ref. 4. Interestingly enough, as discussed later, this trend reverses
in proximity to the wing.

Further analysis of Figure 5 indicates that the relative drag levels
change with the nacelles approaching the fuselage or wing. The governing
factor appears to be the relative amount of nacelle surface area in proxi-
mity to the wing or fuselage. Thus, the shortest nacelle (N4) has a lower
drag than N1 in the vicinity of the wing and fuselage. Also, the thinnest
nacelle (N3), which had the highest isolated drag, has the lowest drag in
the vicinity of the wing because it is furthest from the wing. The same
drastic increase for nacelles in proximity to the wing occurs even with
the nacelles mounted outboard of the fuselage (P3), as shown in Figure 10.

A curve of drag ratio to nondimensional minimum nacelle height above
the wing at a Mach number of 0.5 is presented in Figure 11. The drag
ratio is defined as the ratio of the incremental nacelle drag as installed
on a body/wing configuration divided by the particular isolated nacelle
drag. The curve is general for all nacelles except N3, which was excluded

5

because of possible local separation in the isolated case. As mentioned above, the data in Figure 11 show that nacelle interference drag tends to increase as the nacelle approaches the wing. While the curve is general, caution should be used in applying it to other nacelles in that fuselage proximity or other local conditions could alter the data. It should also be pointed out that t is curve is only valid below the sharp drag rise associated with these nacelles.

An attempt was made to develop a curve similar to Figure 11 for the effect of fuselage proximity on nacelle drag. However, this effect is not as pronounced as wing proximity; therefore in combination with local effects, no similar curve was developed.

LONGITUDINAL, VERTICAL, AND SPANWISE NACELLE VARIATION

Movement of the nacelle forward or aft of the wing substantially reduces the nacelle interference drag. Of the two movements, movement aft of the wing provides the greatest benefit; see Figure 12.

Vertical movement up and away from the wing reduces the interference drag, as shown in Figure 13. The effect of spanwise movement of the nacelles with wing off is shown in Figure 14, and the incremental drag for this effect is shown in Figure 15. Movement away from the fuselage decreases overall drag till pylon drag begins to play a significant role, at which point drag increases; see Figure 14. However, from an incremental drag viewpoint, as shown in Figure 15, the nacelle drag continuously decreases with spanwise movement.

Figure 16 shows the effect on drag of spanwise movement of the nacelle for wing-on configurations. For the N1 nacelle the drag is "lowest" in proximity to the fuselage and increases as the distance from the fuselage increases. However, the opposite variation in drag occurs for the N2 nacelle. Conflicting trends also occur for spanwise variation of the N1 nacelle forward of the wing compared to aft of the wing.

A possible explanation for these anomalies may be that the interference drag of the nacelle reaches a maximum with the nacelles in some proximity to the fuselage, but decreases with spanwise movement in either direction from this maximum. Thus the N1 nacelle on the P1 pylon has a

6

smaller minimum distance to the fuselage (because of fuselage contour) than the N2 nacelle on the same P1 pylon and therefore may be on the decreasing part of the drag versus spanwise position curve. This theory is somewhat substantiated by data in Figure 13 which show that for the N1 nacelle moved closer to the fuselage by using the LA pylon in the LW position, the drag also decreases.

INCREMENTAL PYLON DRAG

Incremental pylon drag is presented in Figure 17. Not only is there a detrimental drag interference between nacelle and wing, but this same effect holds true for the pylon and wing.

STANDARD AERODYNAMIC COEFFICIENTS

Curves of C_L versus α, C_L versus C_D, and C_M versus α for some typical body/nacelle and body/wing/nacelle configurations, respectively, are presented in Figures 18 and 19. Of significance in Figure 18 is the longitudinal destabilizing effect of the wide nose body. This effect carries through even with the wings on, as shown in Figure 19; but nacelles mounted over and aft of the wing improve the stability, although they tend to make the pitching moment more negative. Also of significance in the figure is the penalty in lift incurred when the nacelles are mounted above or aft of the wing.

CONCLUSIONS

The following conclusions have been drawn from analysis of the data:

1. Nacelles in proximity to the wing and fuselage yield an incremental drag level three to four times the isolated nacelle drag, producing approximately 50 percent of the total aircraft drag.

2. Movement away from the fuselage/wing combination longitudinally or vertically tends to reduce interference drag, with movement aft of the wing yielding the greatest benefit.

3. The installation of nacelles results in drag rise Mach numbers as low as 0.5.

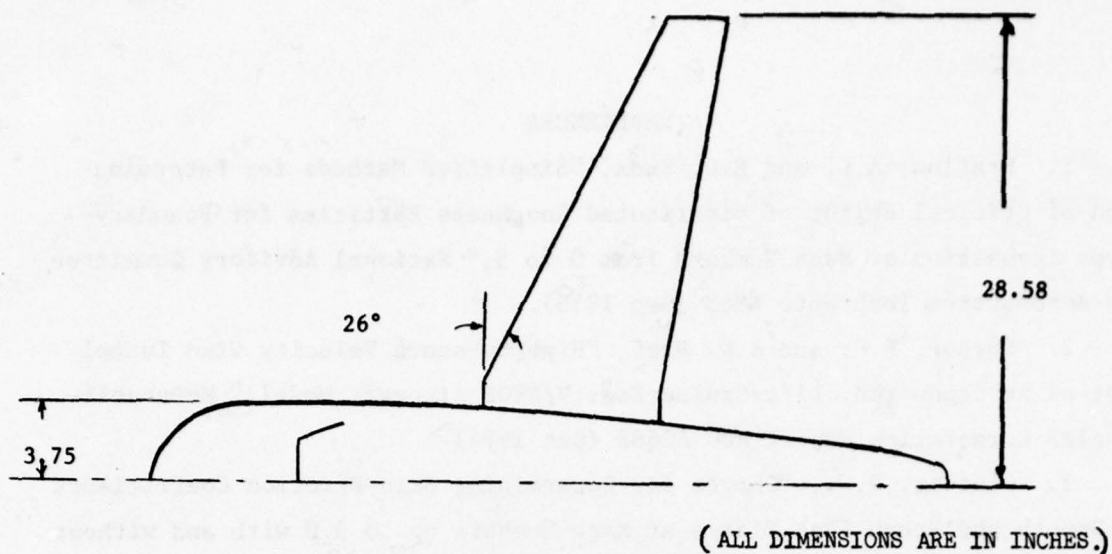4. Pylons also produce a significant amount of interference drag.

7

5. In general, the installation of nacelles has an adverse effect on lift.

6. The wide nose body was longitudinally unstable. The addition of nacelles tended to reduce this instability while producing a more negative pitching moment.

7. There is some evidence from this evaluation indicating that nacelles very close to the fuselage (buried nacelles) tend to reduce interference drag. Further investigation of this area is warranted.

8

REFERENCES

1. Braslow, A.L. and E.C. Knox, "Simplified Methods for Determination of Critical Height of Distributed Roughness Particles for Boundary-Layer Transition at Mach Numbers from 0 to 5," National Advisory Committee for Aeronautics Tech Note 4363 (Sep 1958).

2. Snyder, R.C. and A.N. Heck, "High Subsonic Velocity Wind Tunnel Test of an Unpowered, Lift/Cruise Fan, V/STOL Aircraft Model," McDonnell-Douglas Corporation Report MDC A2688 (Dec 1974).

3. Clutter, D.W., "Charts for Determining Skin-Friction Coefficients on Smooth and Rough Flat Plates at Mach Numbers up to 5.0 with and without Head Transfer," Douglas Aircraft Company Report ES 29074 (Apr 1959).

4. More, E. and J. Ottensoser, "A Computer Program for the Prediction of Theoretical Pressure Distributions over General Airfoil Sections by Theodorsens' Method of Conformal Transformation," NSRDC Report ASED-118 (May 1969).

9

26°

28.58

3.75

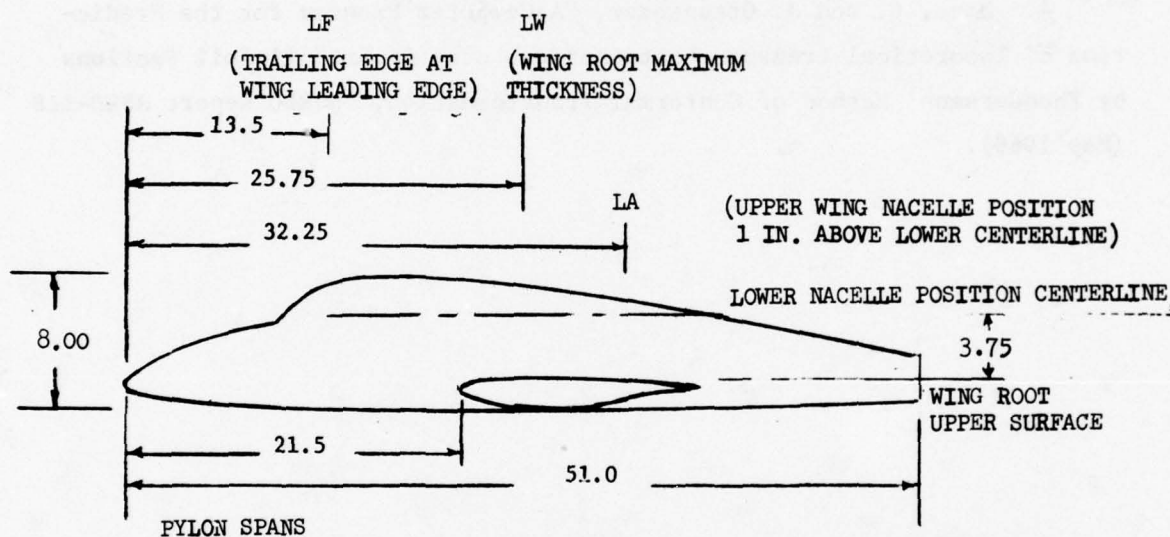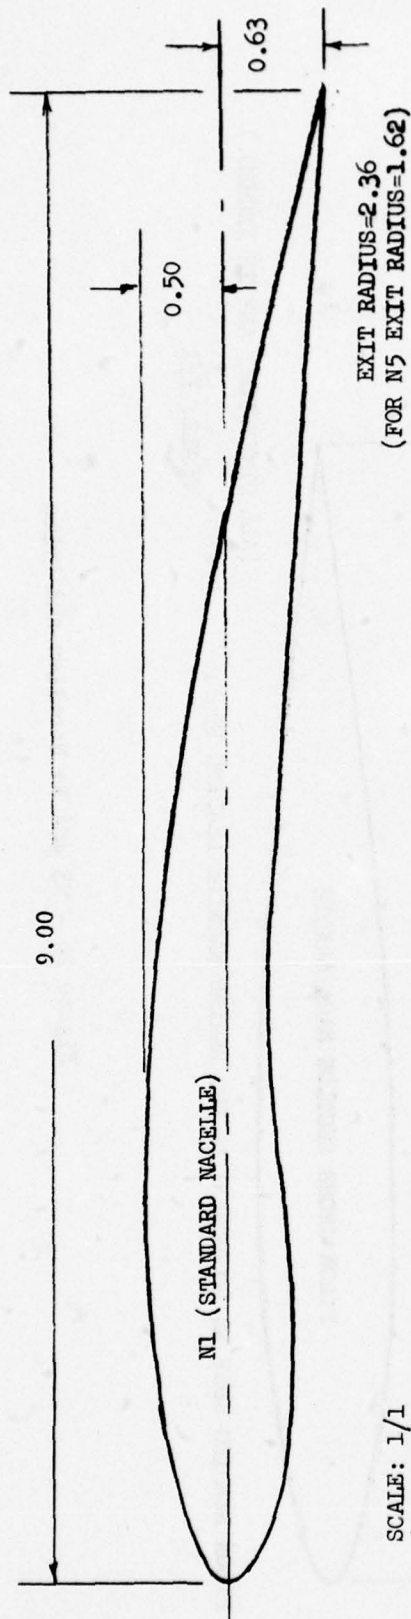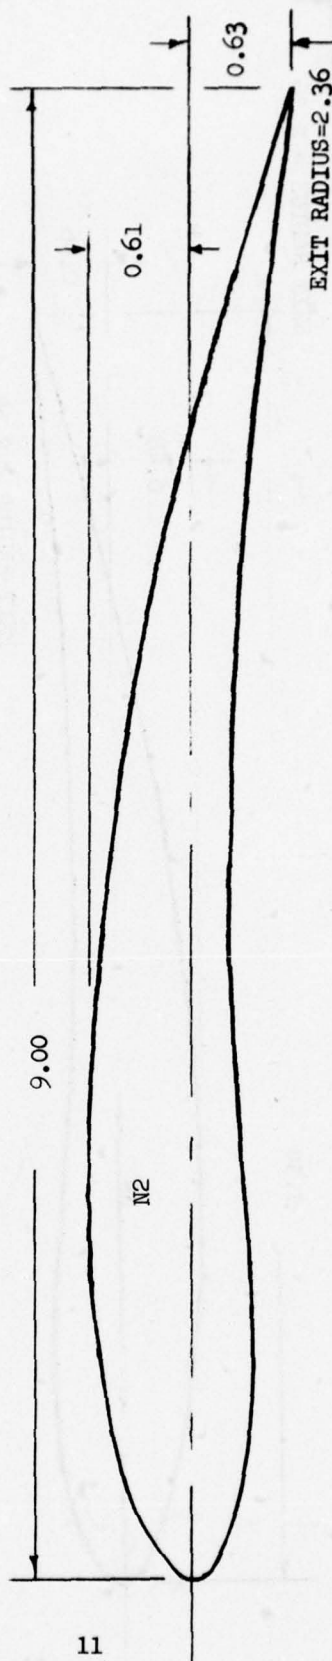(ALL DIMENSIONS ARE IN INCHES.)

NACELLE LEADING EDGE LOCATIONS

LF   LW

(TRAILING EDGE AT   (WING ROOT MAXIMUM
WING LEADING EDGE)   THICKNESS)

13.5

25.75

32.25   LA

(UPPER WING NACELLE POSITION
1 IN. ABOVE LOWER CENTERLINE)

LOWER NACELLE POSITION CENTERLINE

8.00

3.75

WING ROOT
UPPER SURFACE

21.5

51.0

PYLON SPANS

	P1	P2	P3	P4
x	0.75	2.55	4.50	12.0

"x" IS THE SPANWISE DISTANCE MEASURED BETWEEN THE
NACELLE LEADING EDGE AND THE LOCAL FUSELAGE CONTOUR
AND IS HELD CONSTANT AT THE THREE LONGITUDINAL
POSITIONS.

Figure 1 - Schematic of the Model

10

9.00

0.50

0.63

EXIT RADIUS=2.36

(FOR N5 EXIT RADIUS=1.62)

N1 (STANDARD NACELLE)

SCALE: 1/1
(ALL DIMENSIONS ARE IN INCHES.)

9.00

0.61

0.63

EXIT RADIUS=2.36

N2

11

NOTE: 1. High-lite radius is 3.0 in. for all nacelles except N5. For N5 the high-lite radius is 2.25 in. and its cross section contour is the same as N1.
2. Nacelle exit lip thickness is nominally 0.025 in.
3. The length of all nacelles is 9.0 in. except for N4 whose length is 7.5in.

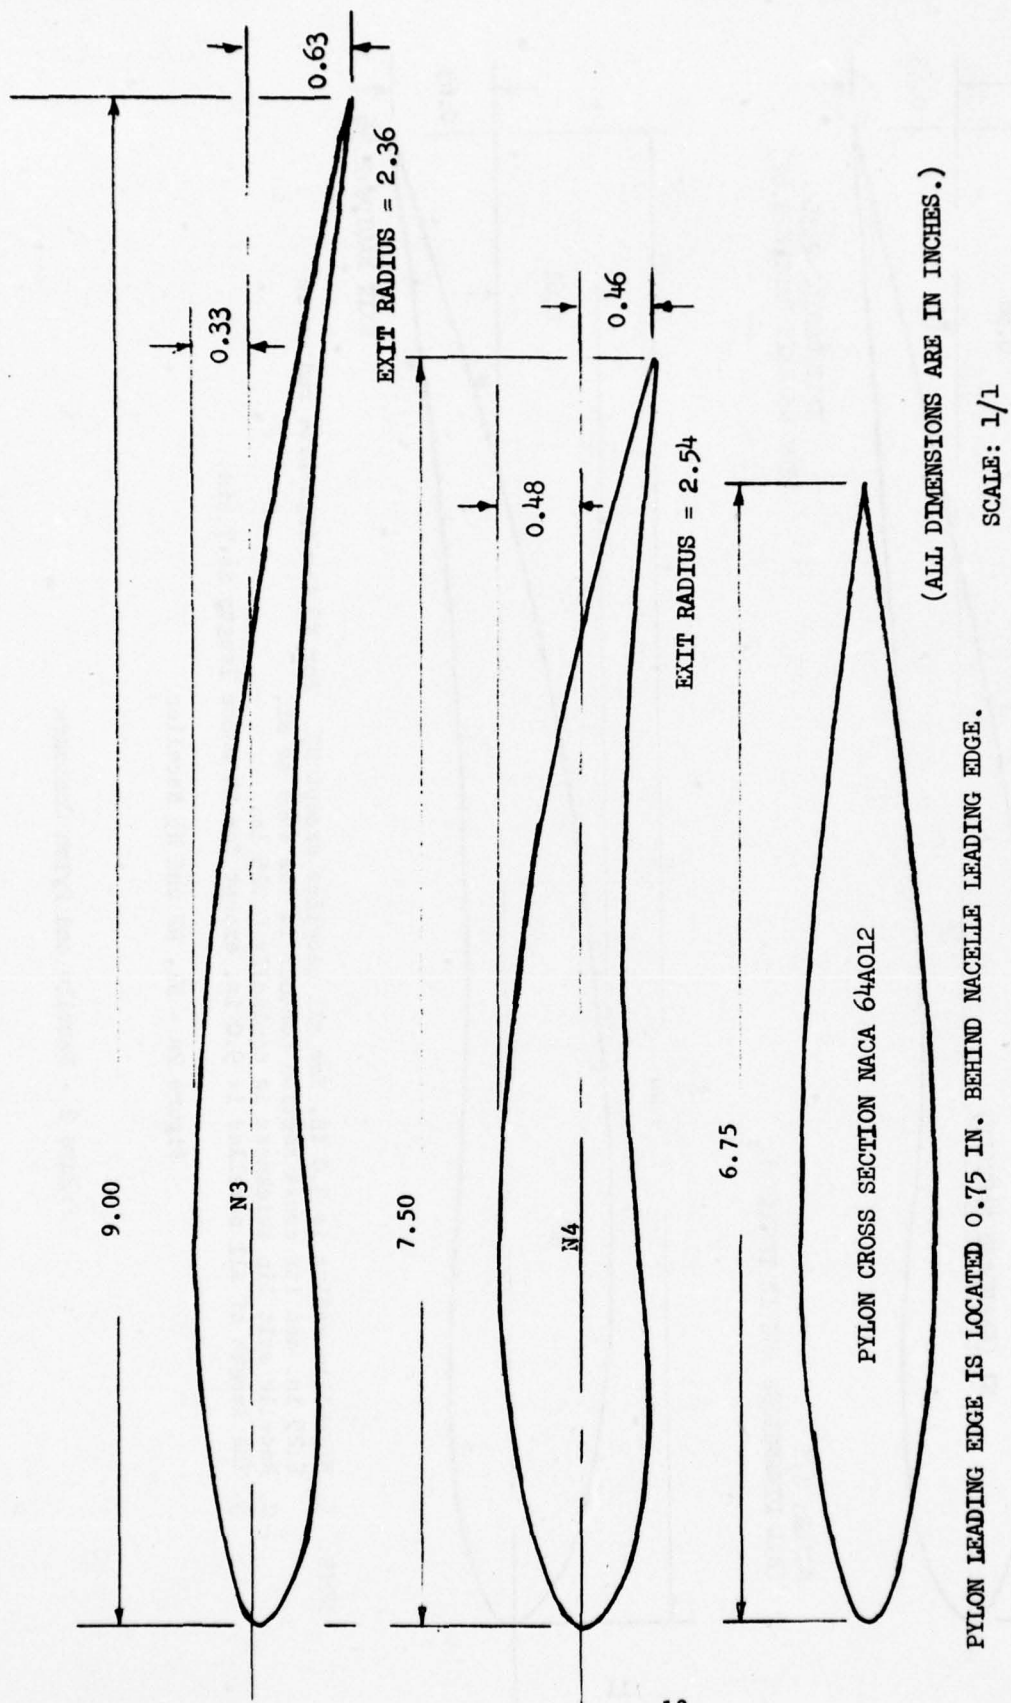Figure 2a - N1, N2 and N5 Nacelles

Figure 2 - Nacelle and Pylon Contours

0.63

EXIT RADIUS = 2.36

0.33

0.46

0.48

EXIT RADIUS = 2.54

(ALL DIMENSIONS ARE IN INCHES.)

SCALE: 1/1

9.00

N3

7.50

N4

6.75

PYLON CROSS SECTION NACA 64A012

PYLON LEADING EDGE IS LOCATED 0.75 IN. BEHIND NACELLE LEADING EDGE.
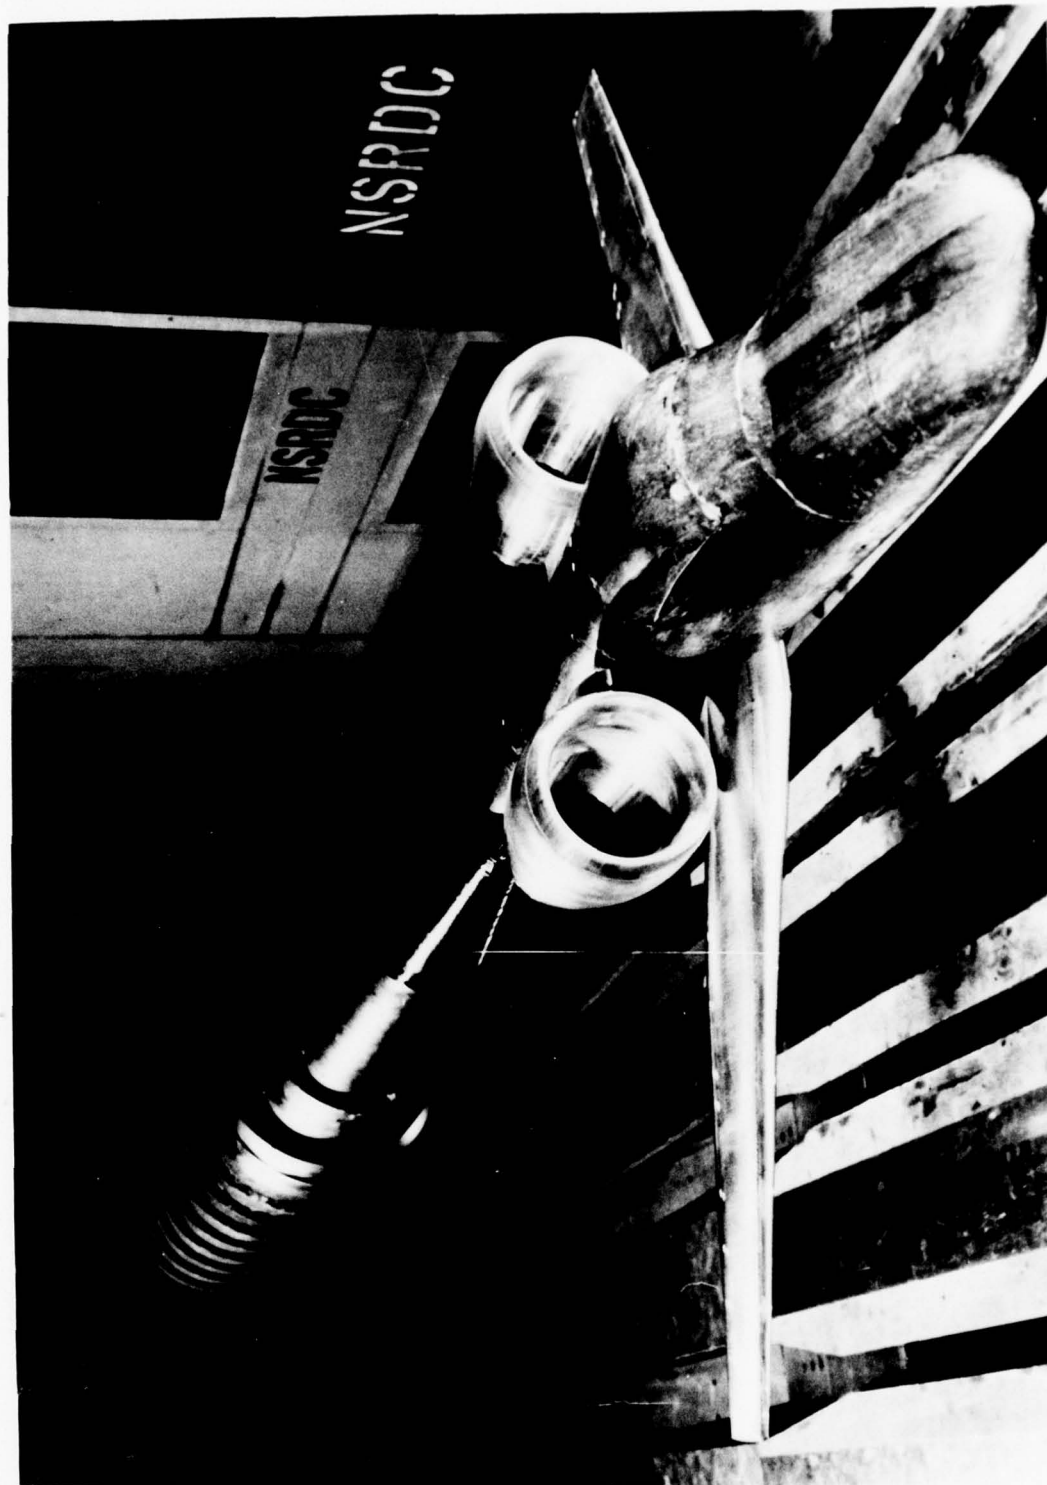
Figure 2b - N3 and N4 Nacelles and Pylon

12

Figure 3 - Typical Configuration Installed in the 7- by 10- Foot Transonic Wind Tunnel
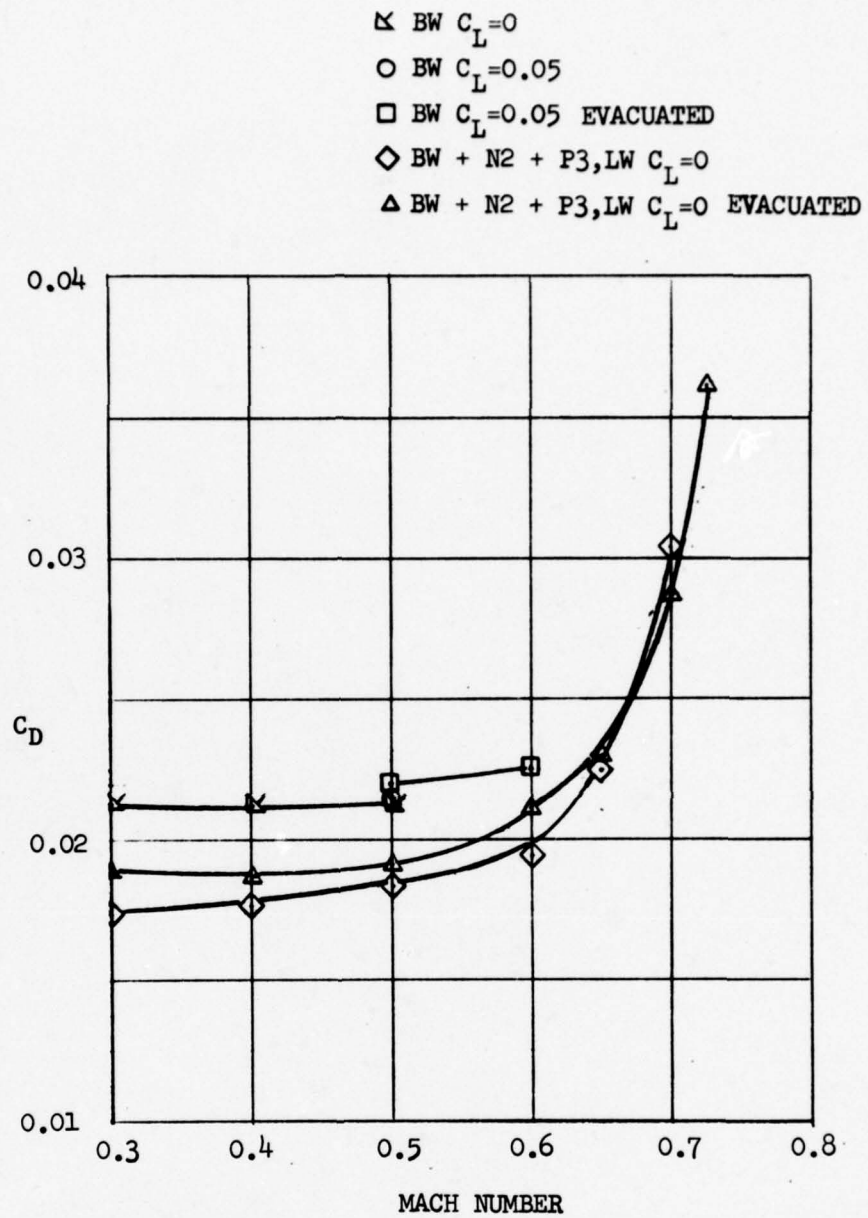
13

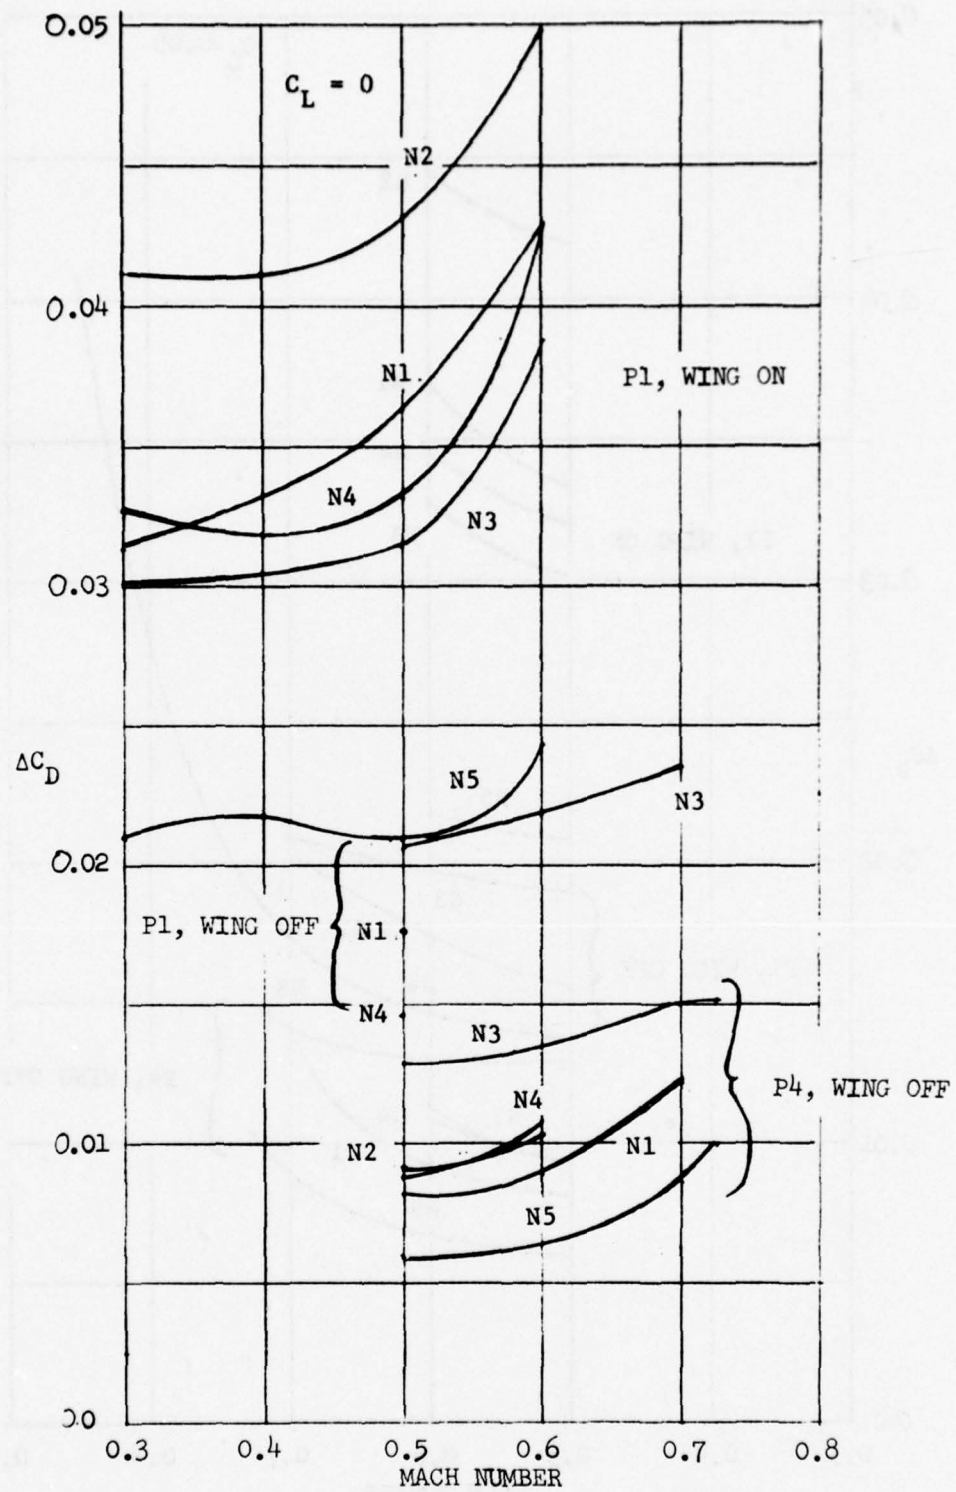Figure 4 - Reynolds Number Effect

14

Figure 5a - $C_L = 0$

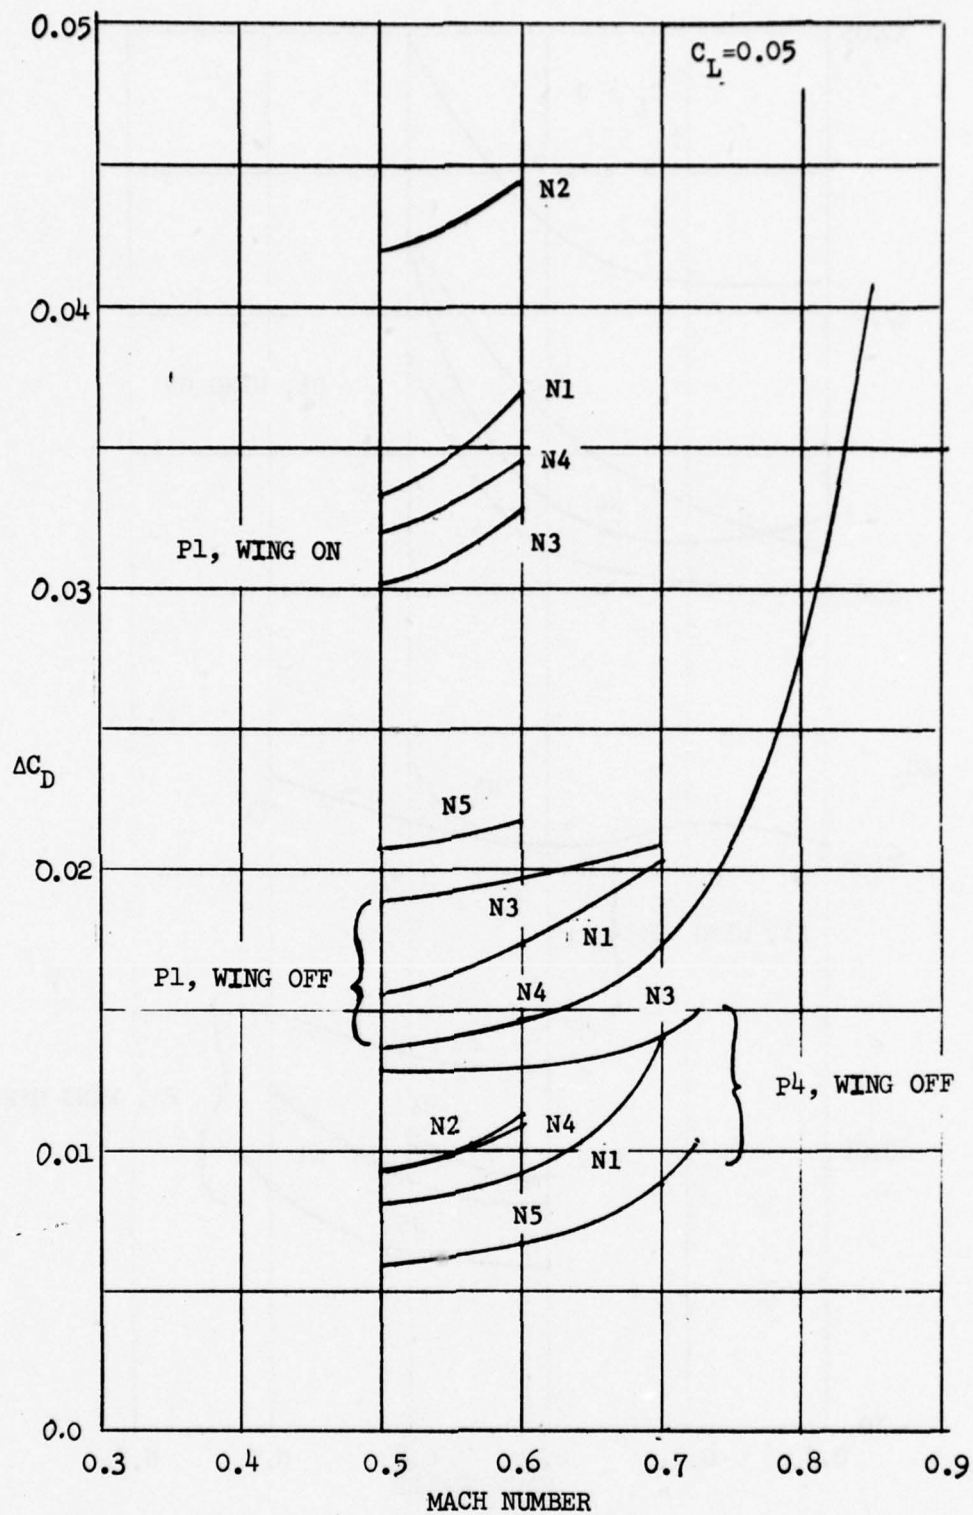Figure 5 - Incremental Nacelle Drag
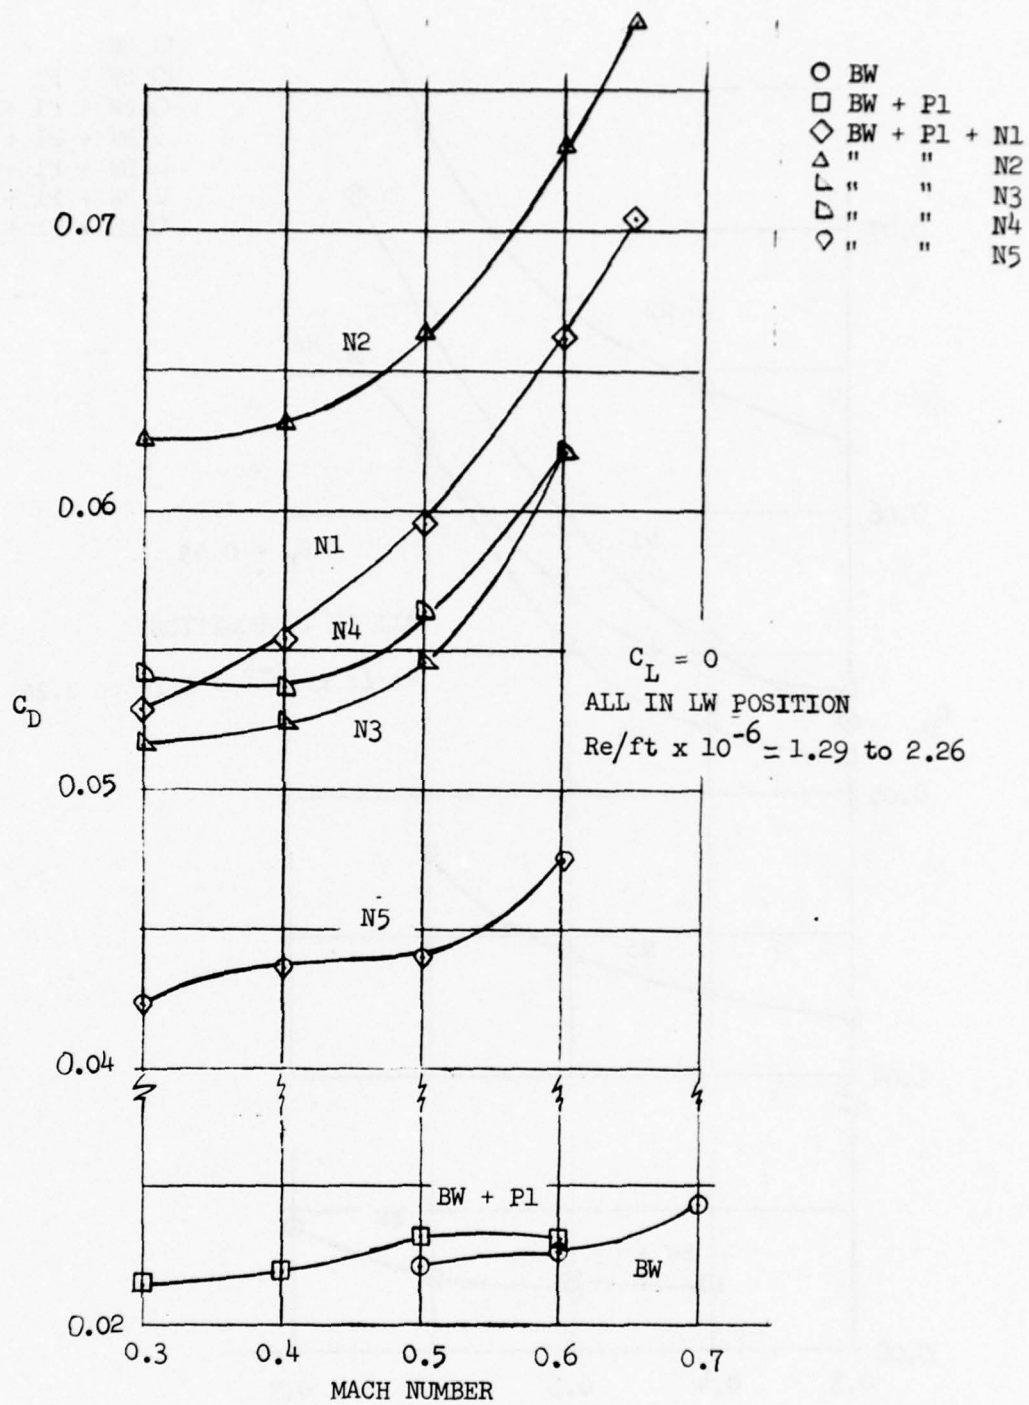
15

Figure 5b - $C_L = 0.05$

Figure 6a - $C_L = 0$

Figure 6 - Comparison of Nacelle Drag on Shortest Pylon with Wing On

17

Figure 6b - C_L = 0.05
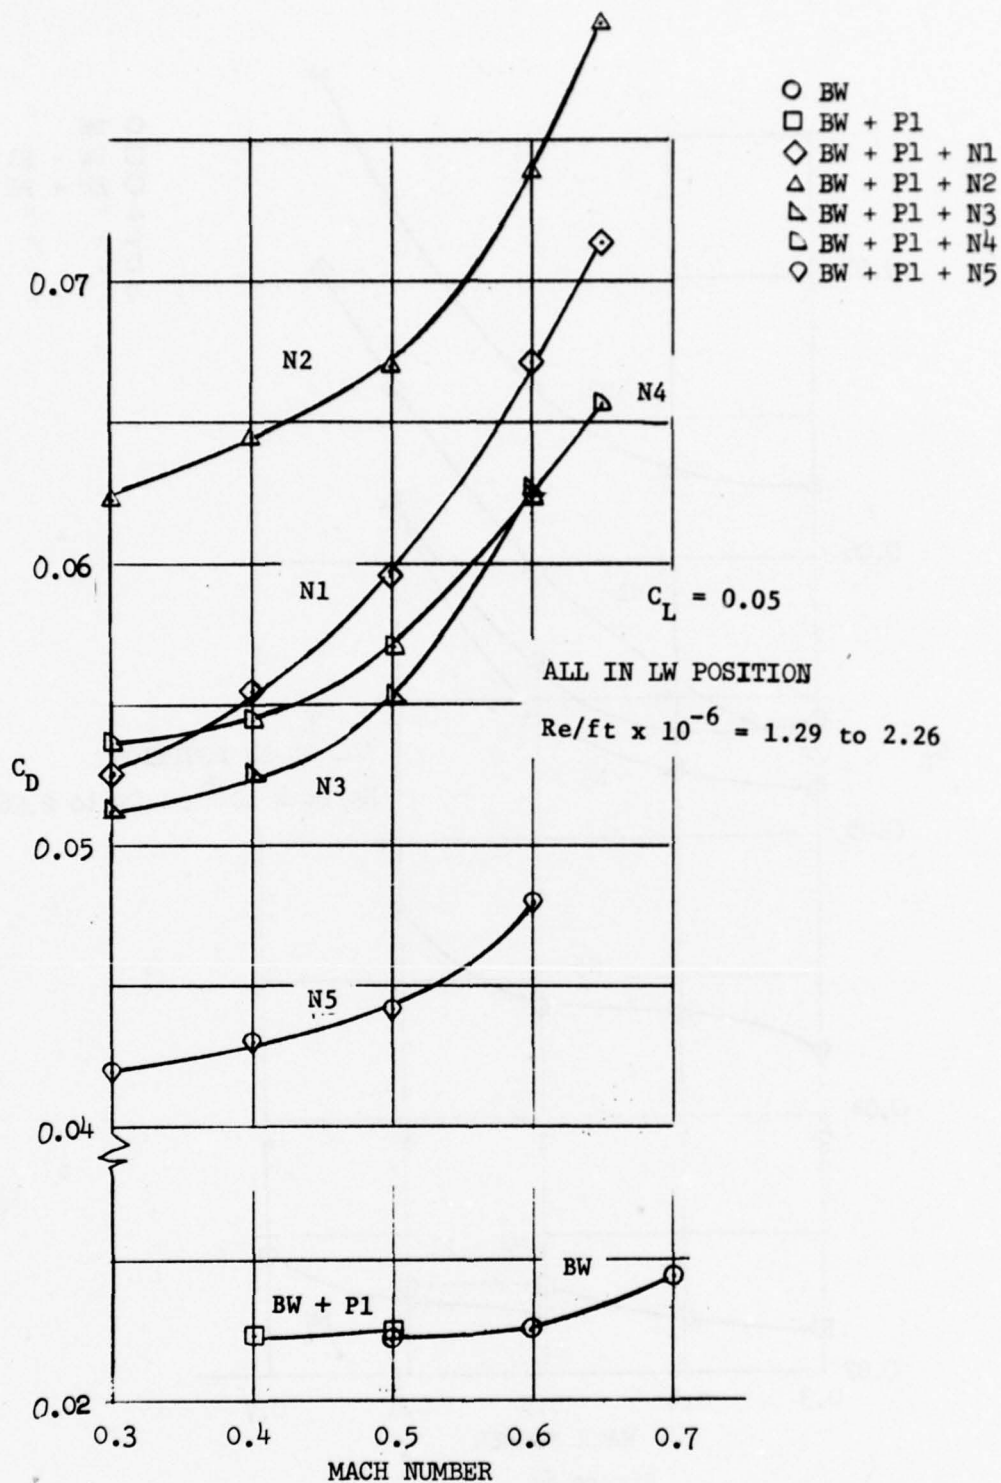
18
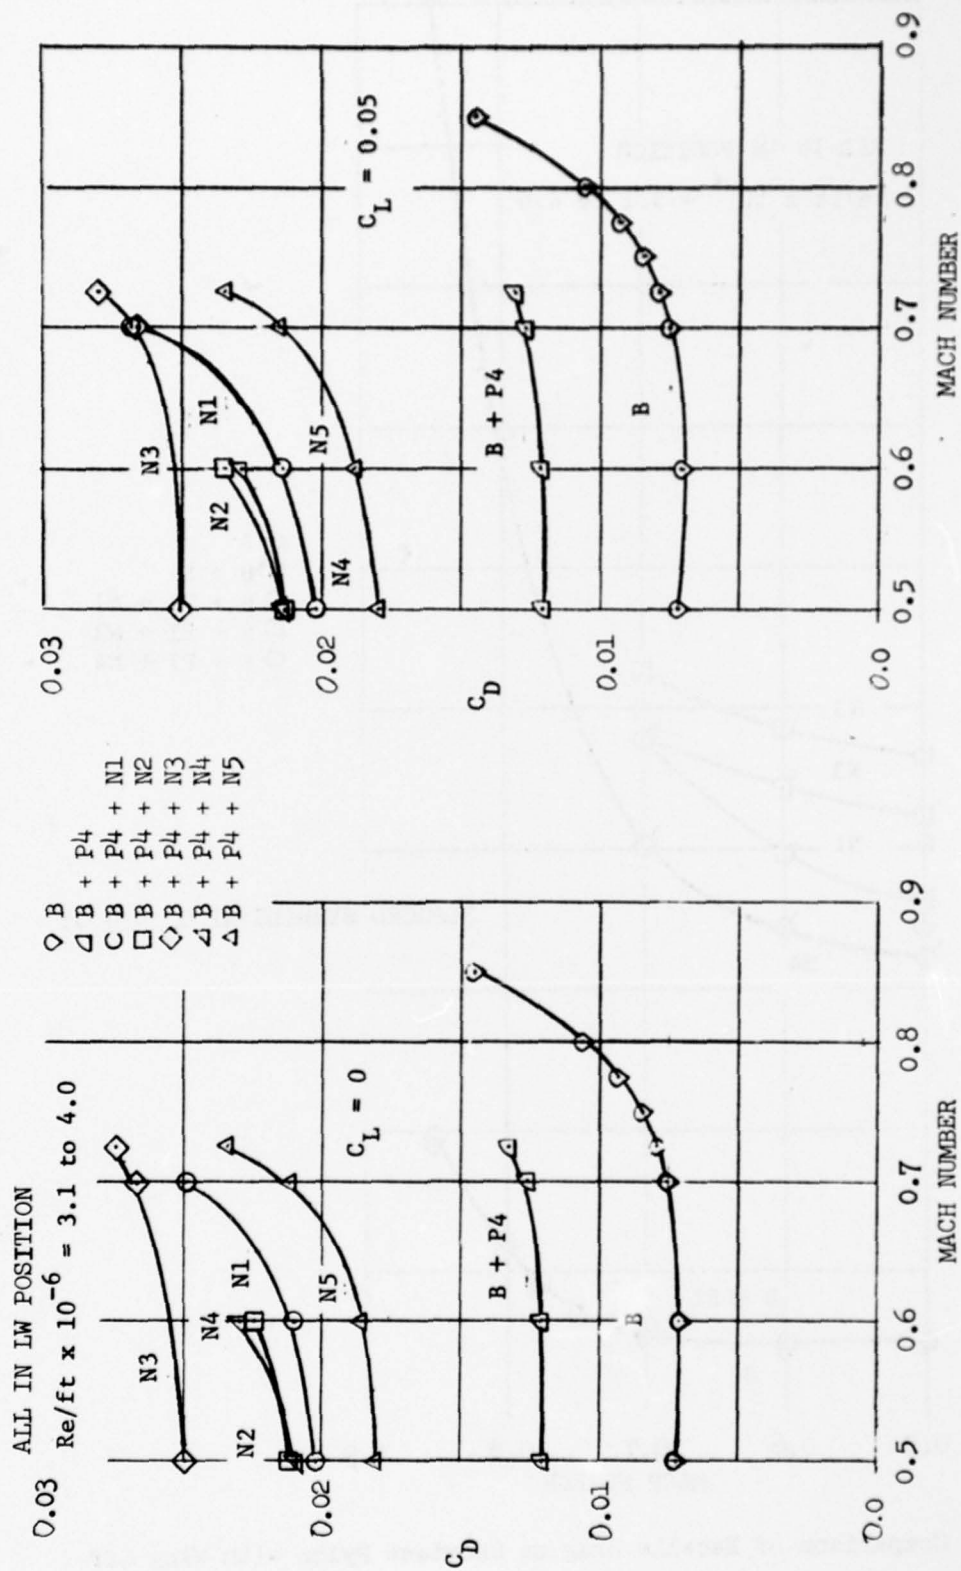
Figure 7 - Comparison of Nacelle Drag on Longest Pylon with Wing Off
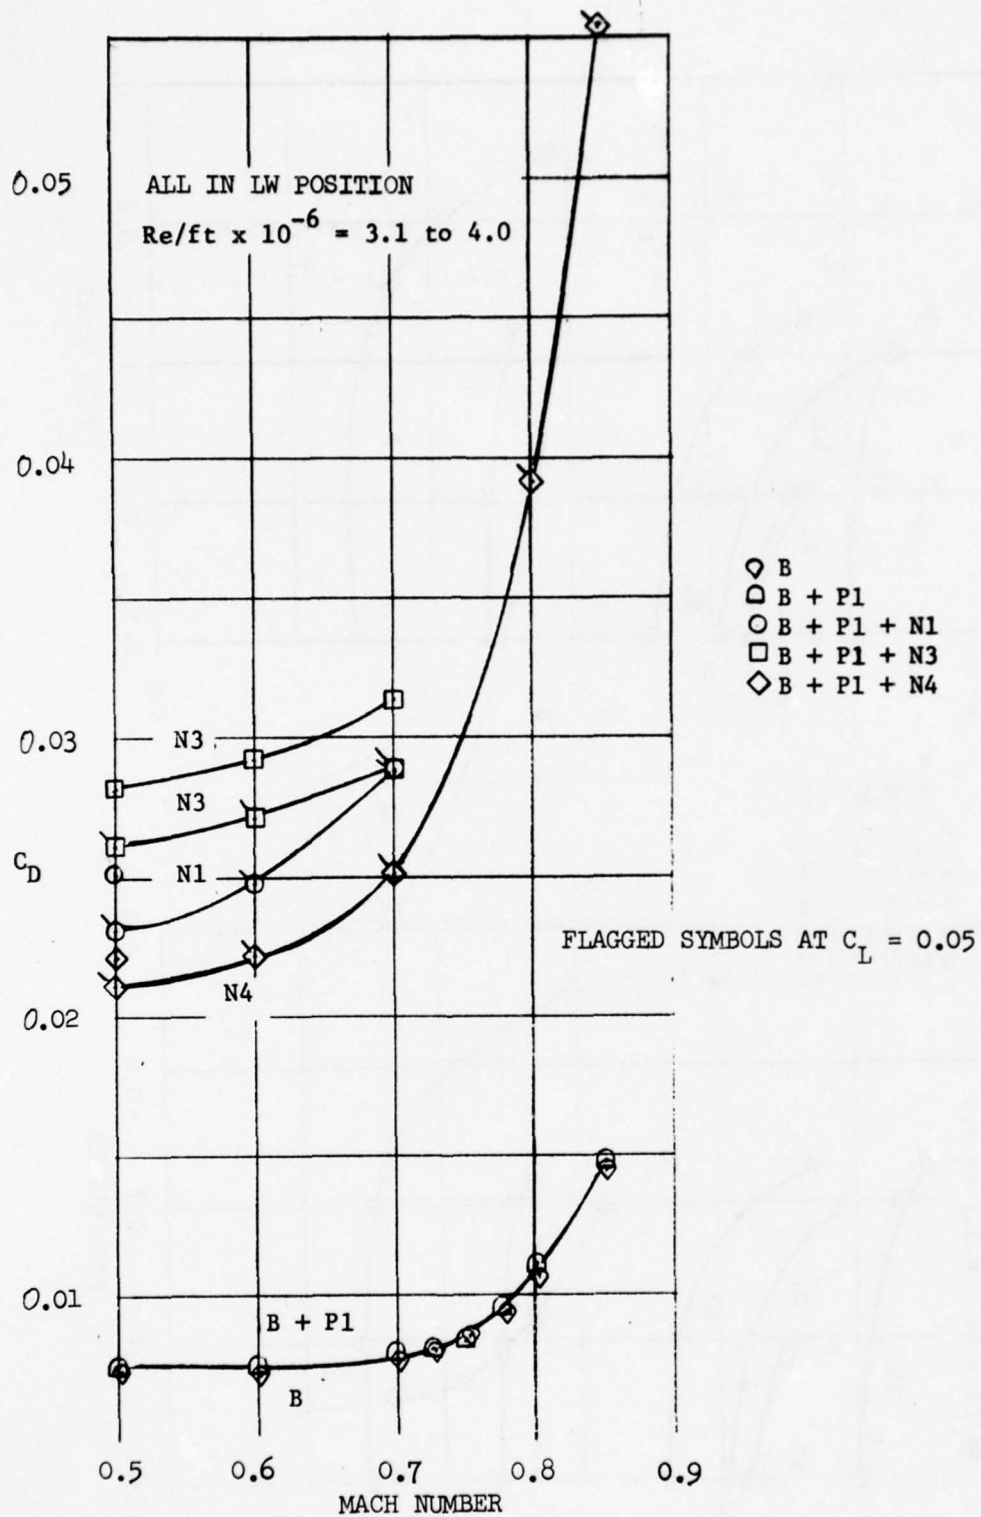
Figure 8 - Comparison of Nacelle Drag on Shortest Pylon with Wing Off

20
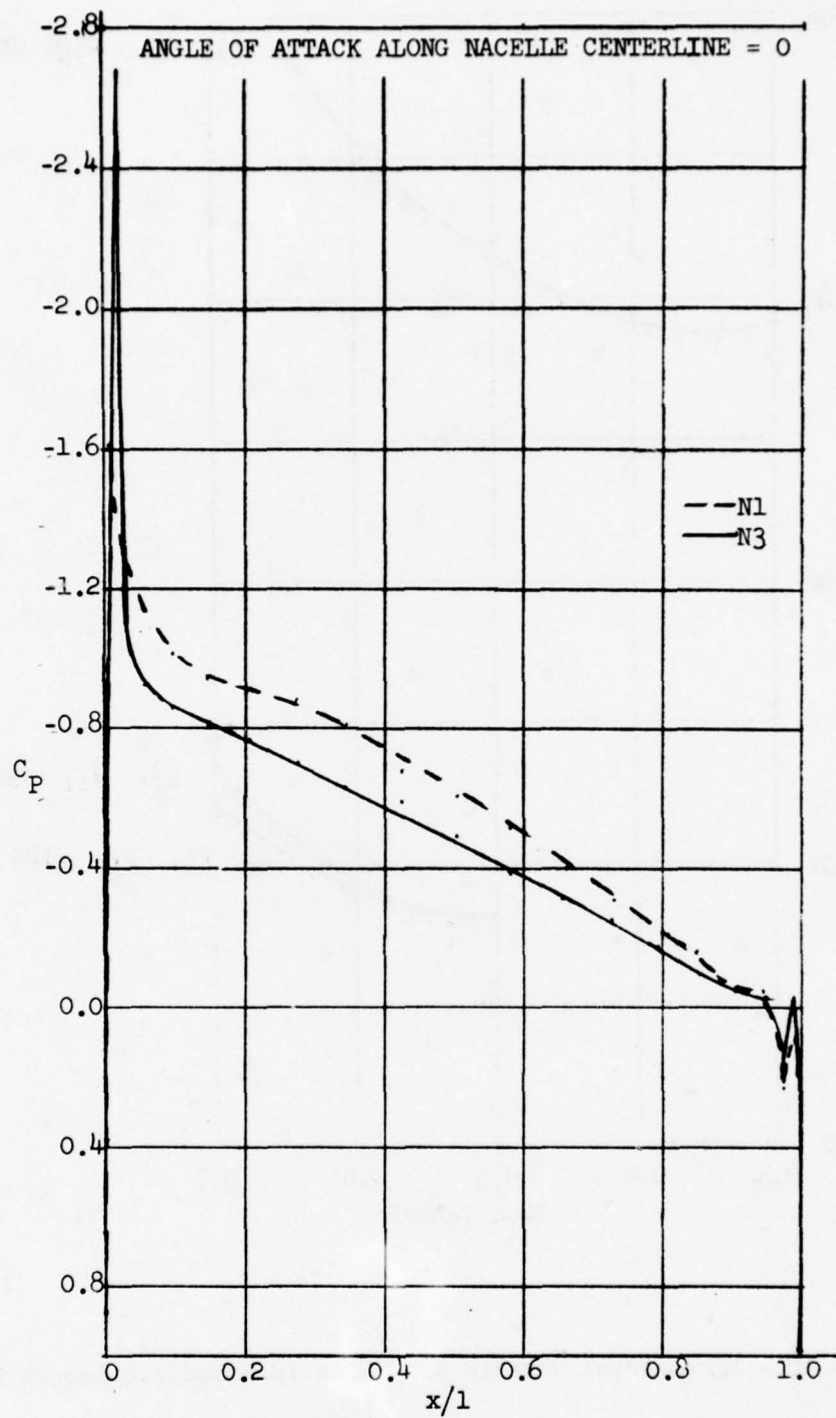
Figure 9 - Theoretical Nacelle Outer Surface Pressure Coefficent Distribution

21
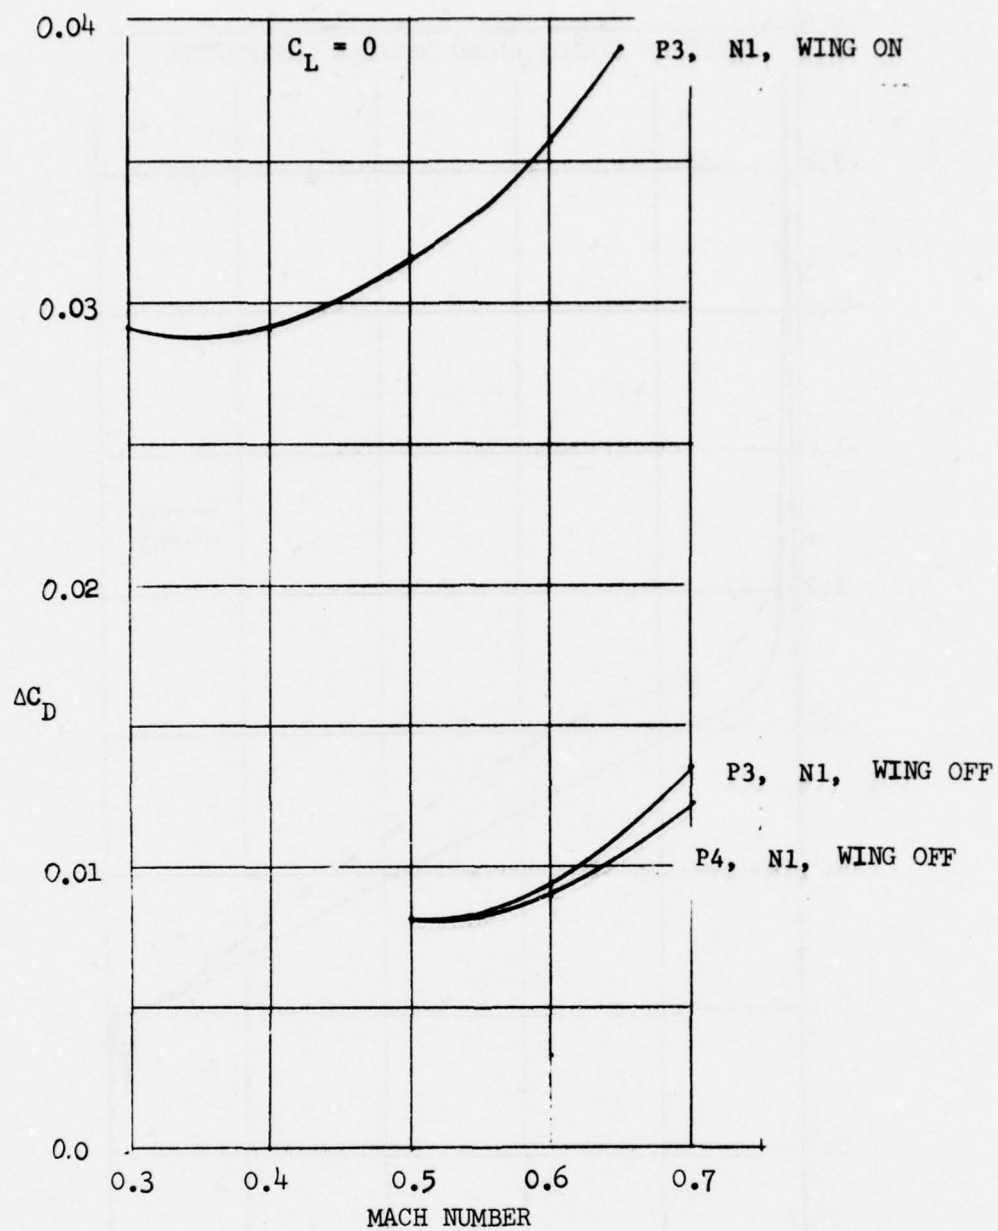
Figure 10 - Incremental Nacelle Drag with Intermediate Length Pylon

22
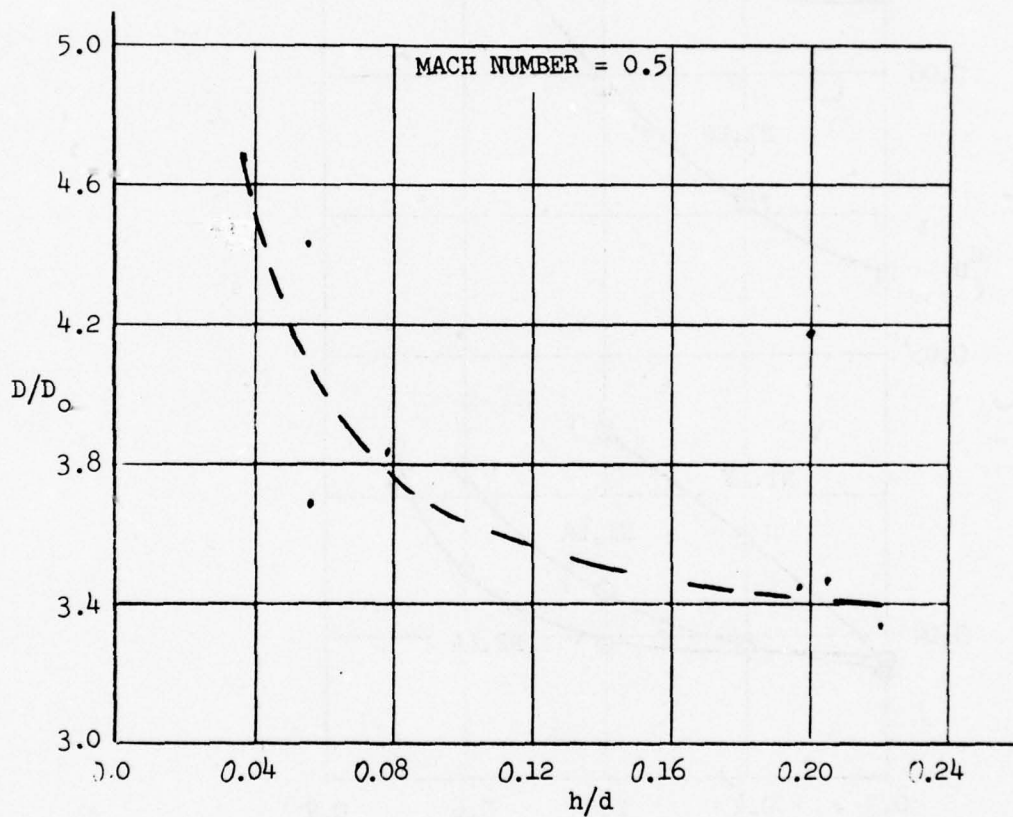
Figure 11 - Drag Ratio versus Nondimensional Minimum Nacelle
Height above Wing

23

Re/ft x 10^{-6} = 1.29 to 2.26

ALL ON P1

○ BW + N1,FWD(LF)
□ BW + N1,WING(LW)
◇ BW + N1,AFT(LA)
△ BW + N2,WING(LW)
▽ BW + N2,AFT(LA)
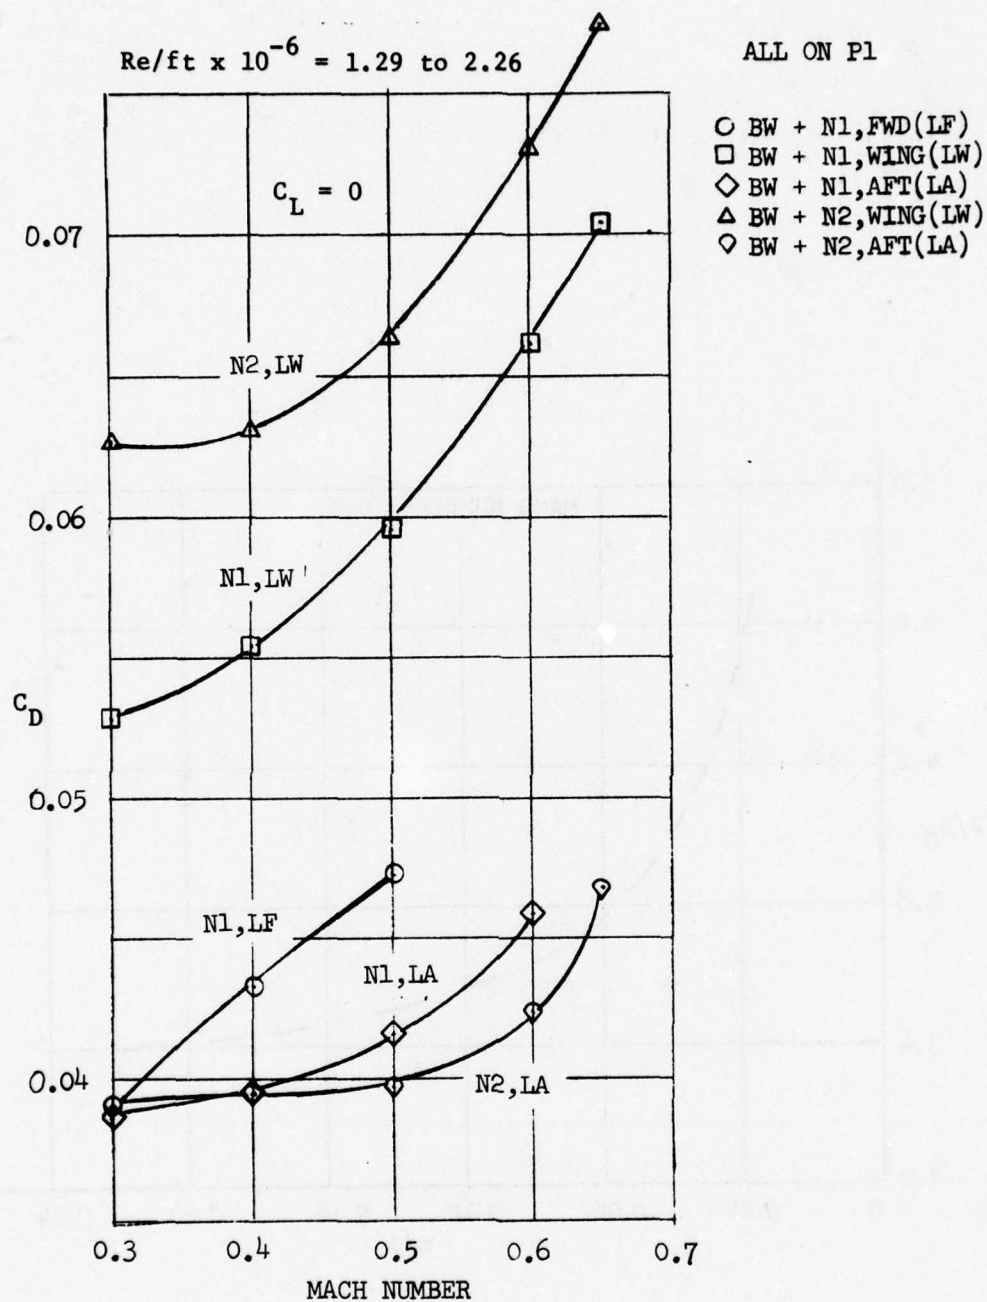
Figure 12a - C_L = 0

Figure 12 - Effect of Longitudinal Nacelle Movement on Drag with Wing On

24

$C_L = 0.05$

$Re/ft \times 10^{-6} = 1.29$ to 2.26

ALL ON P1

○ BW + N1,FWD(LF)
□ BW + N1,WING(LW)
◇ BW + N1,AFT(LA)
△ BW + N2,WING(LW)
▽ BW + N2,AFT(LA)

Figure 12b - $C_L = 0.05$

25

Re/ft x 10^{-6} = 1.29 to 2.26

MACH NUMBER

C_D

0.07

0.06

0.05

0.04

0.3   0.4   0.5   0.6   0.7

$C_L = 0$

MACH NUMBER

C_D

0.07

0.06

0.05

0.04

0.3   0.4   0.5   0.6   0.7

○ BW + N1 + P1,UW
□ BW + N1 + P1,LW
◇ BW + N1 + P1,UW (WITH LA PYLON)
△ BW + N1 + P3,UW
▽ BW + N1 + P3,LW
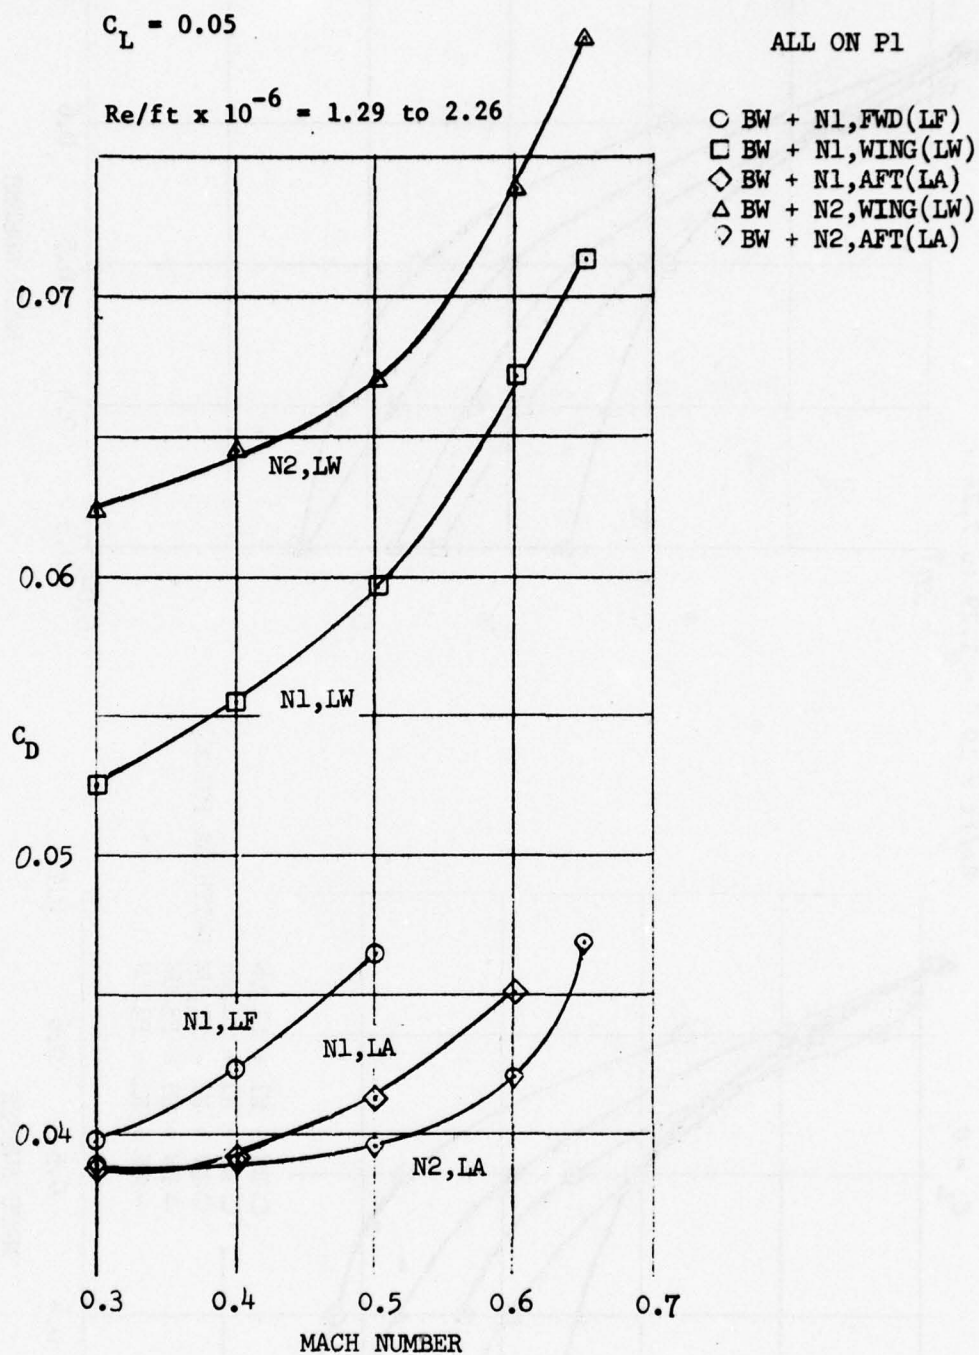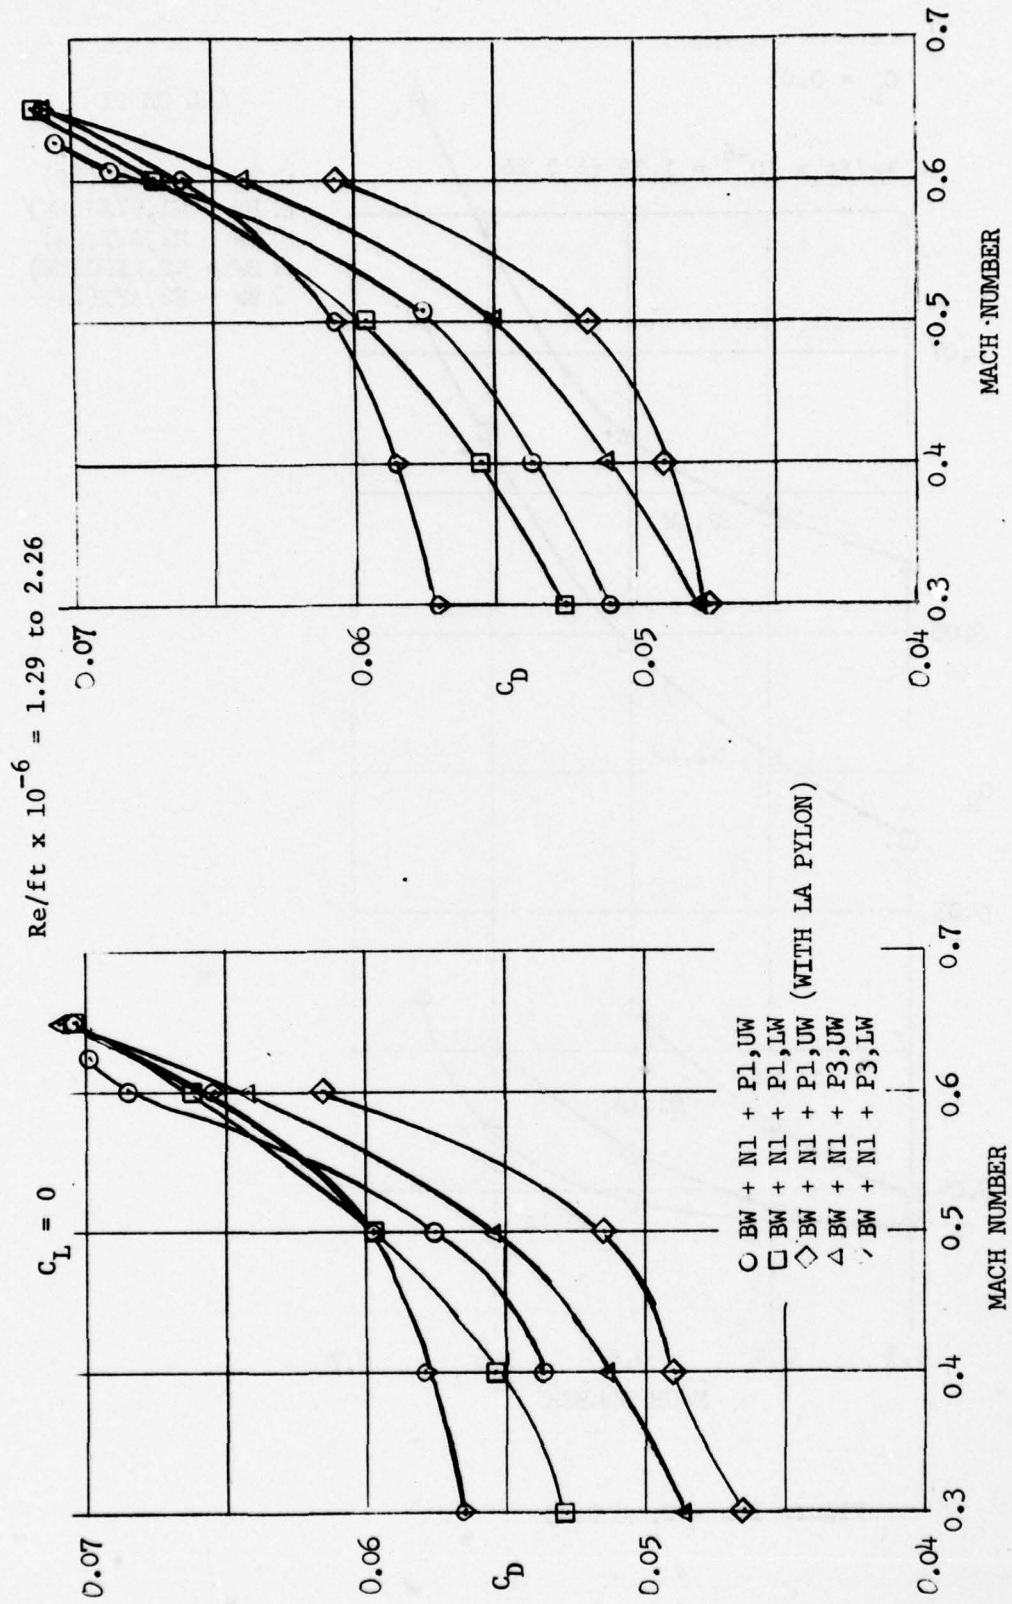
Figure 13 - Effect of Vertical Nacelle Movement on Drag with Wing On

26
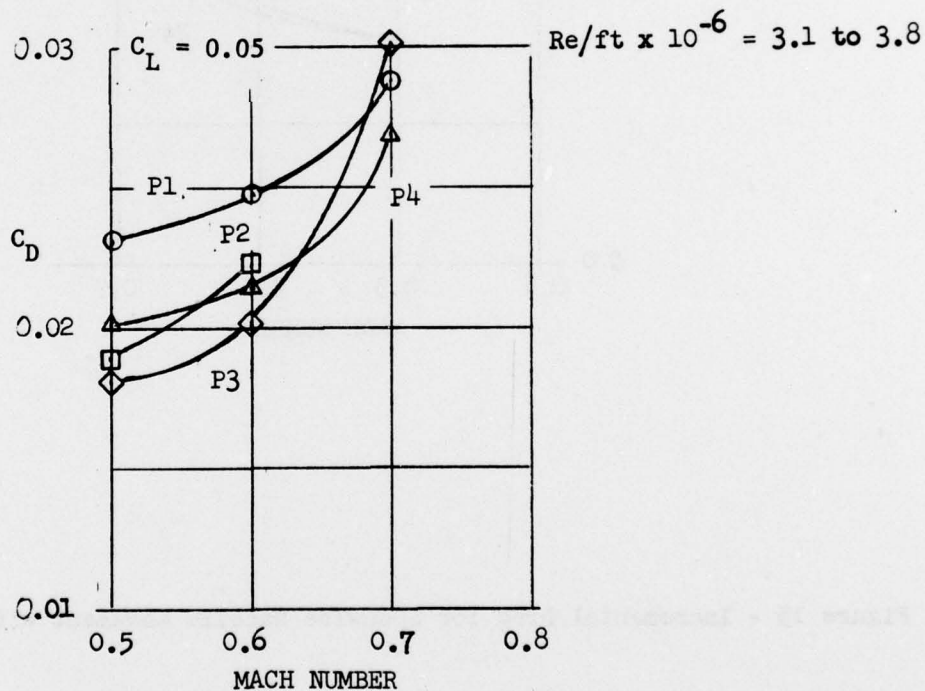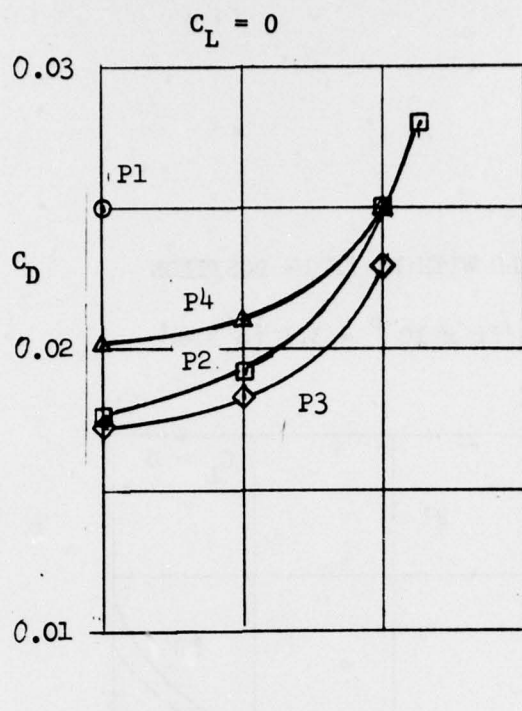
Figure 14 - Effect of Spanwise Nacelle Movement on Drag with Wing Off

27

ALL WITH N1 IN LW POSITION

Re/ft x 10^{-6} = 3.1 to 3.8
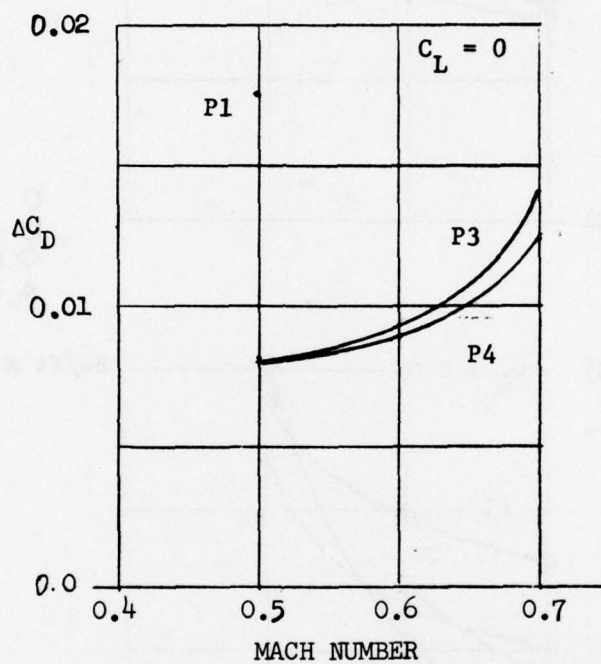
Figure 15 - Incremental Drag for Spanwise Nacelle Movement with Wing Off

28
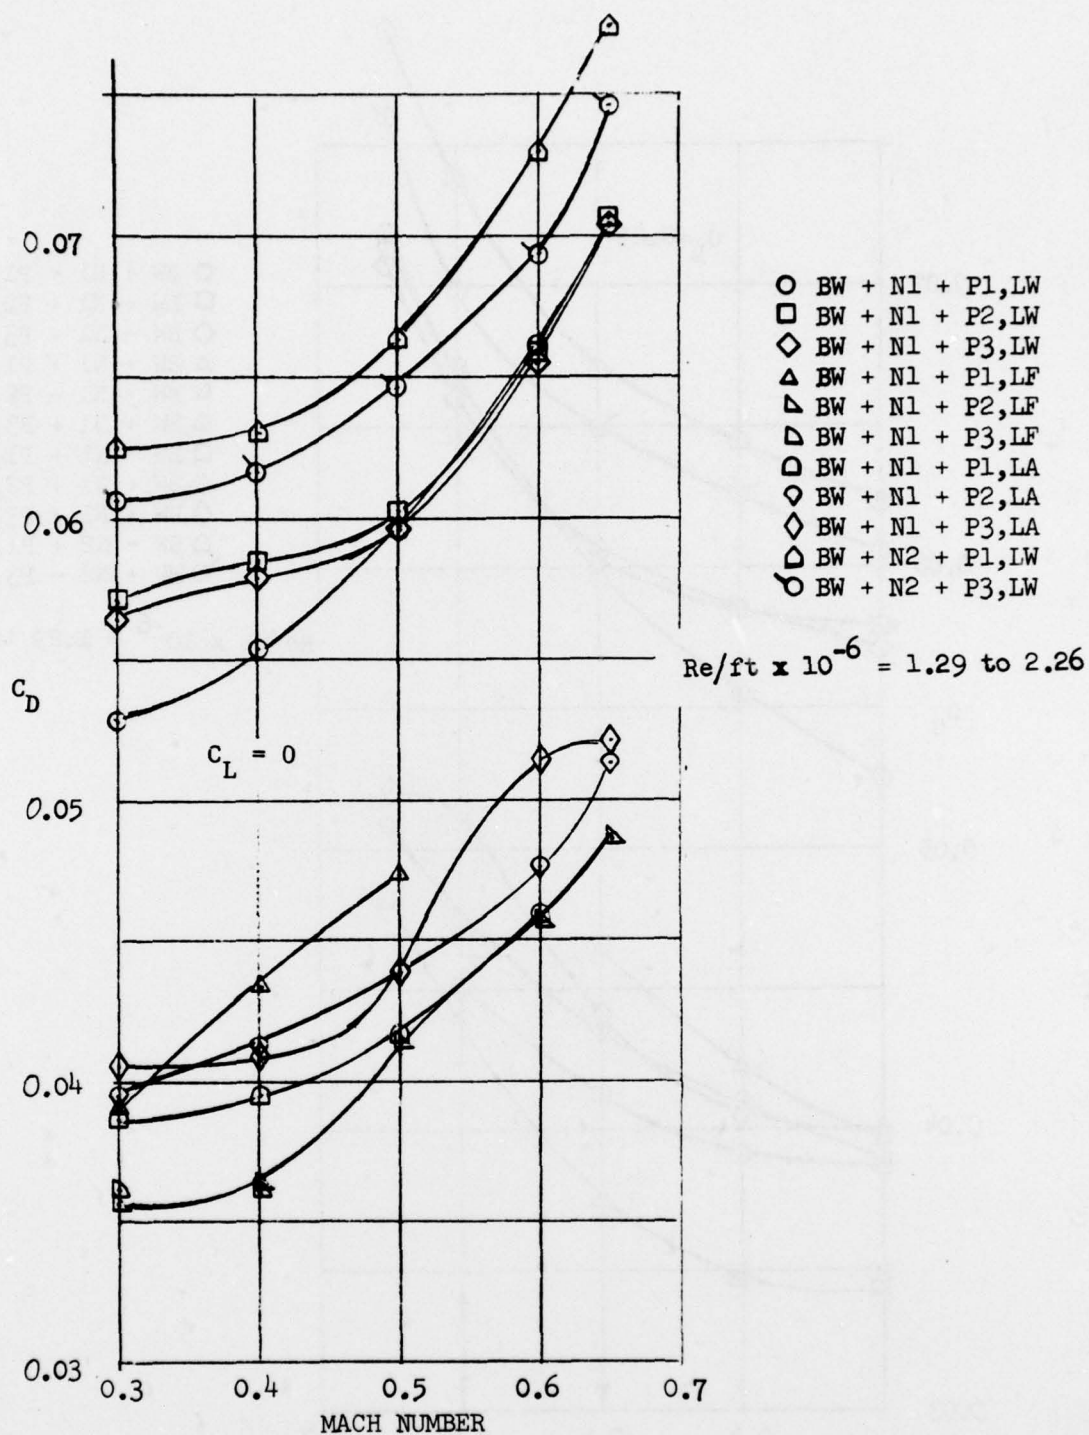
Figure 16a - $C_L = 0$

Figure 16 - Effect of Spanwise Nacelle Movement on Drag with Wing On

29

Figure 16b - $C_L = 0.05$

30
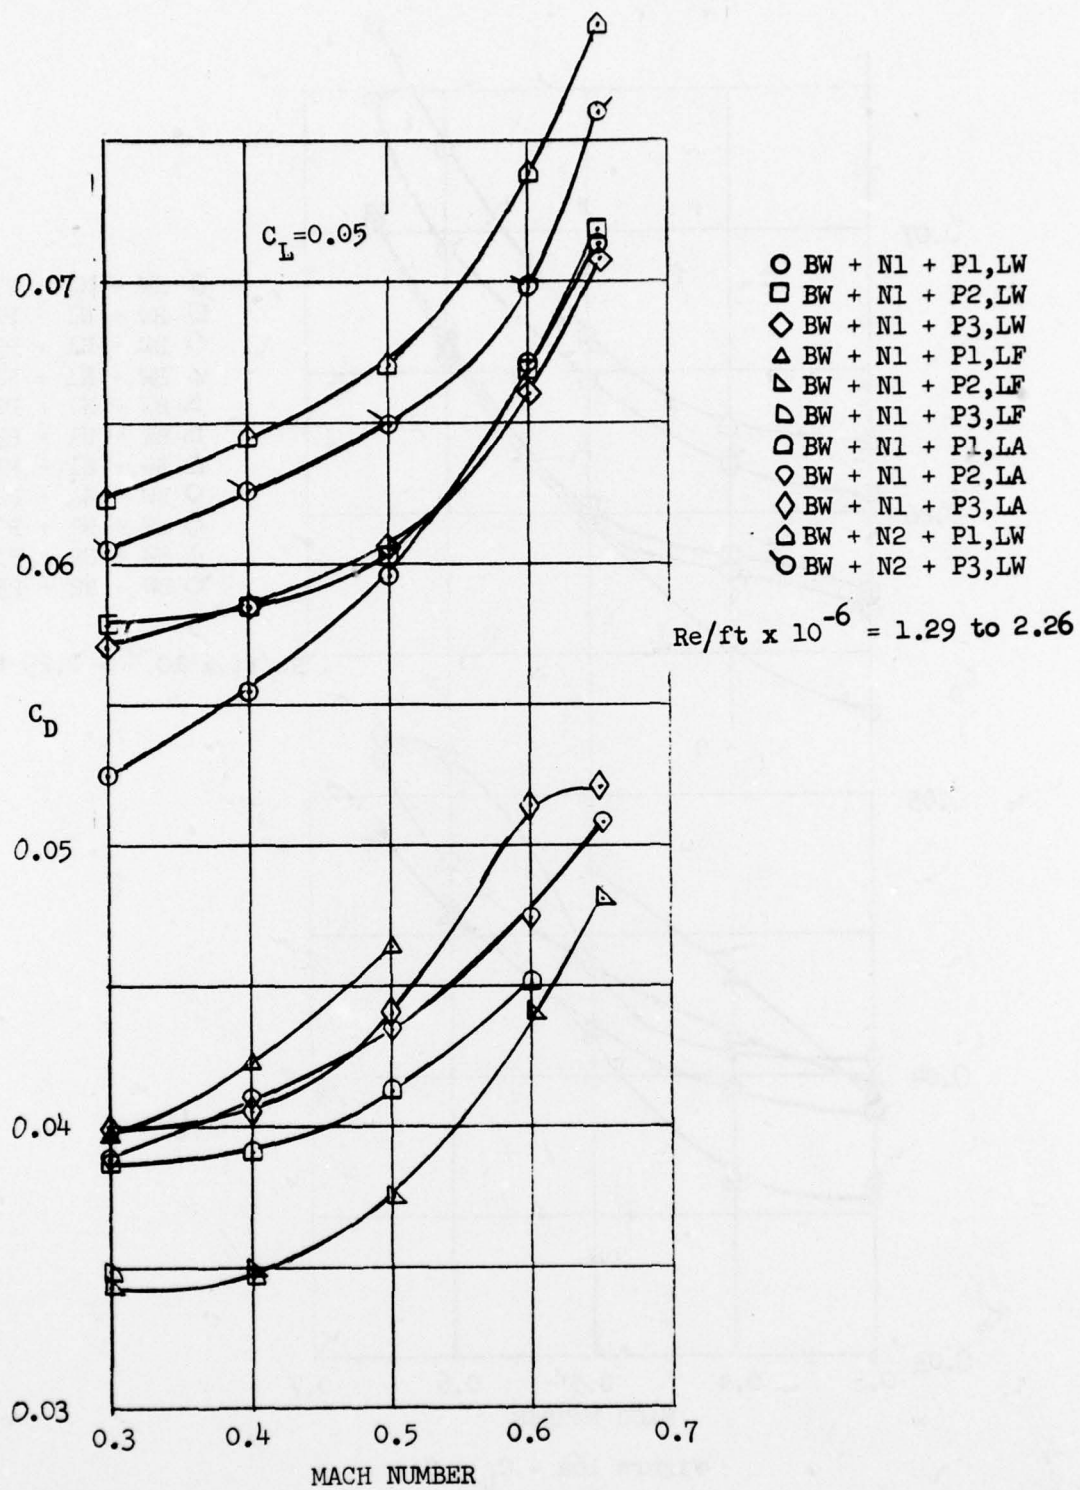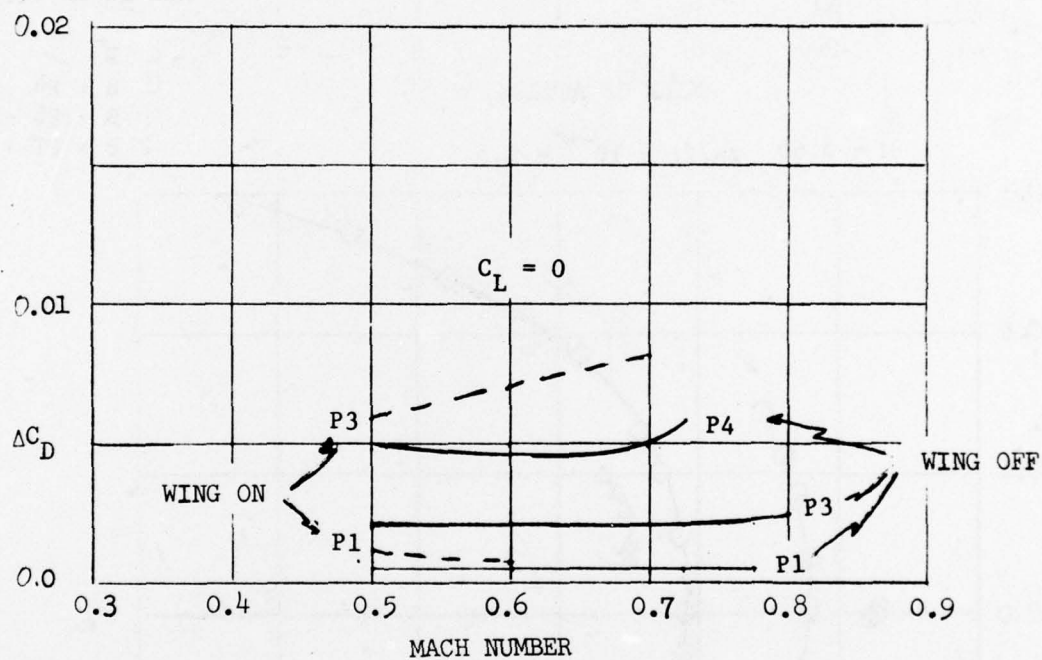
Figure 17 - Incremental Pylon Drag

ALL IN LW POSITION

☾ B
⊏ B + P4
◇ B + P4 + N1
△ B + P1 + N1

M = 0.60   Re/ft x 10^{-6} = 3.5

Figure 18a - C_L versus α and C_L versus C_D

Figure 18 - Basic Aerodynamic Coefficents at a Mach Number of 0.6 with
          Wing Off

32

Figure 18b - C_M versus α

33

Figure 19a - C_L versus α

Figure 19 - Basic Aerodynamic Coefficents at a Mach Number of 0.6 with
          Wing On

34
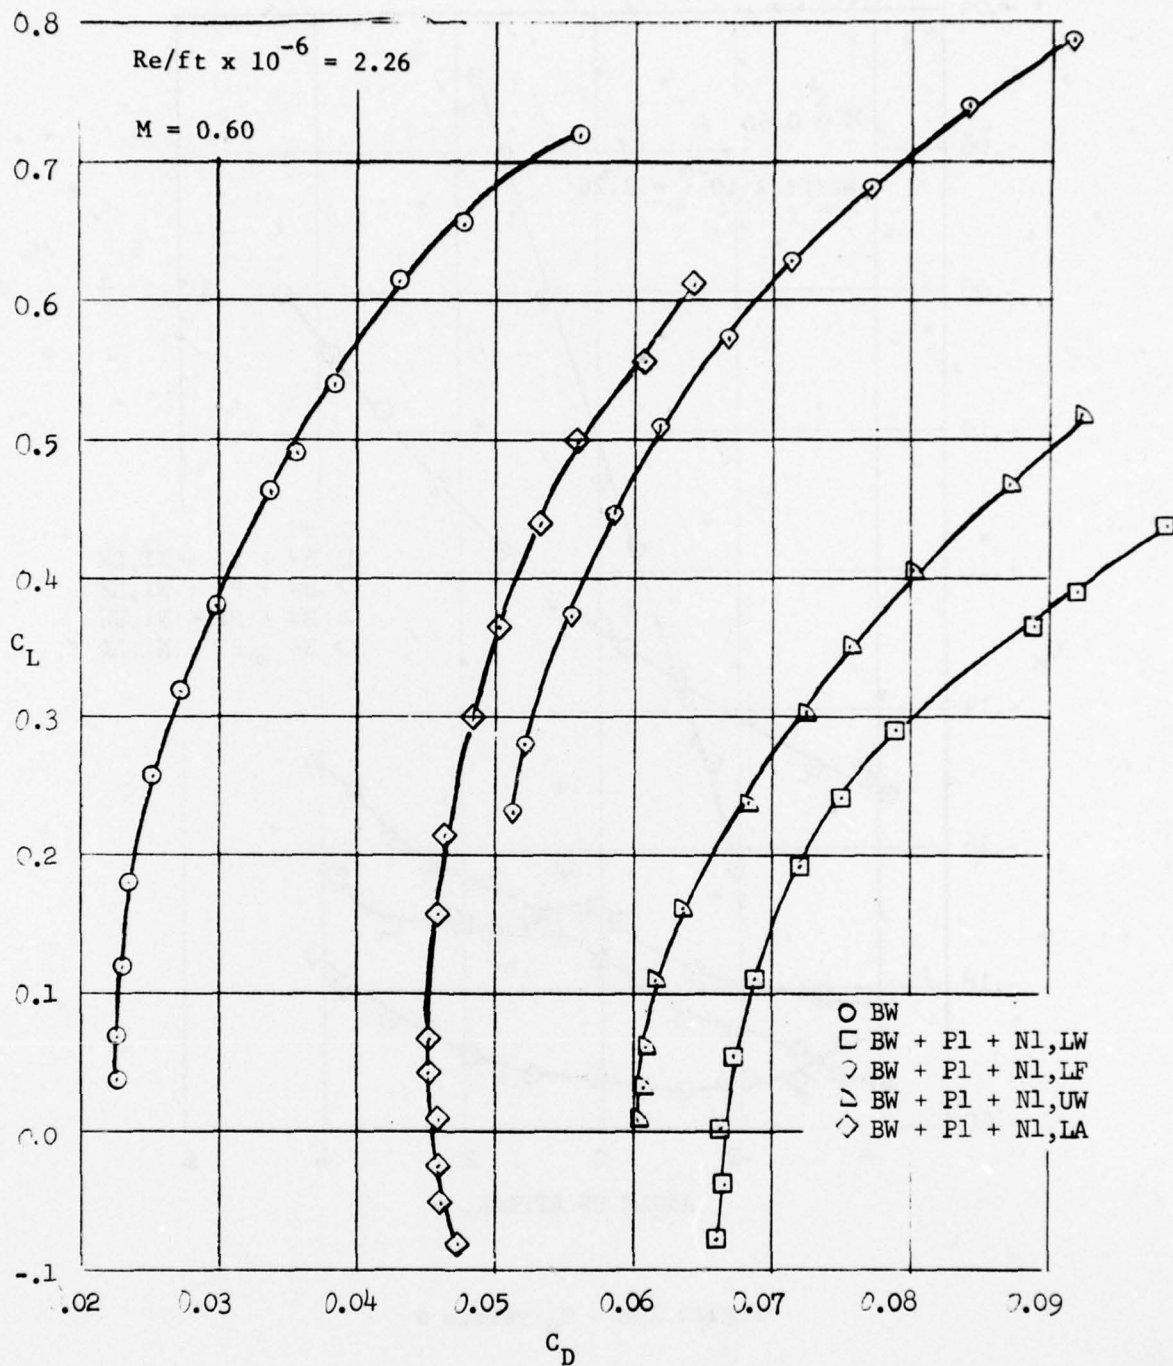
Figure 19b - C_L versus C_D
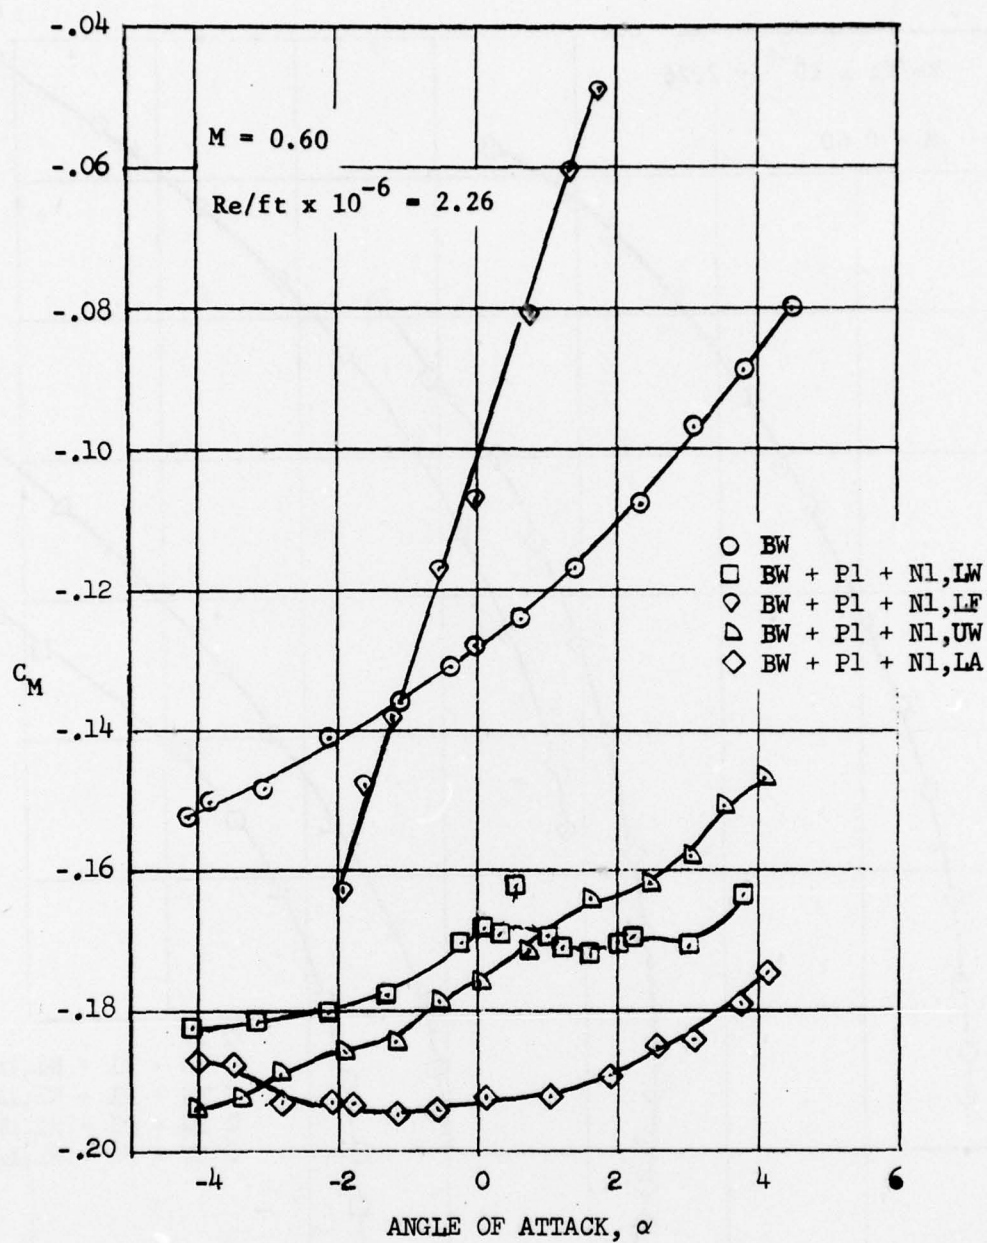
Figure 19c - C_M versus α

36

APPENDIX A

TYPE A V/STOL NACELLE DRAG TUNNEL

RUN LOG

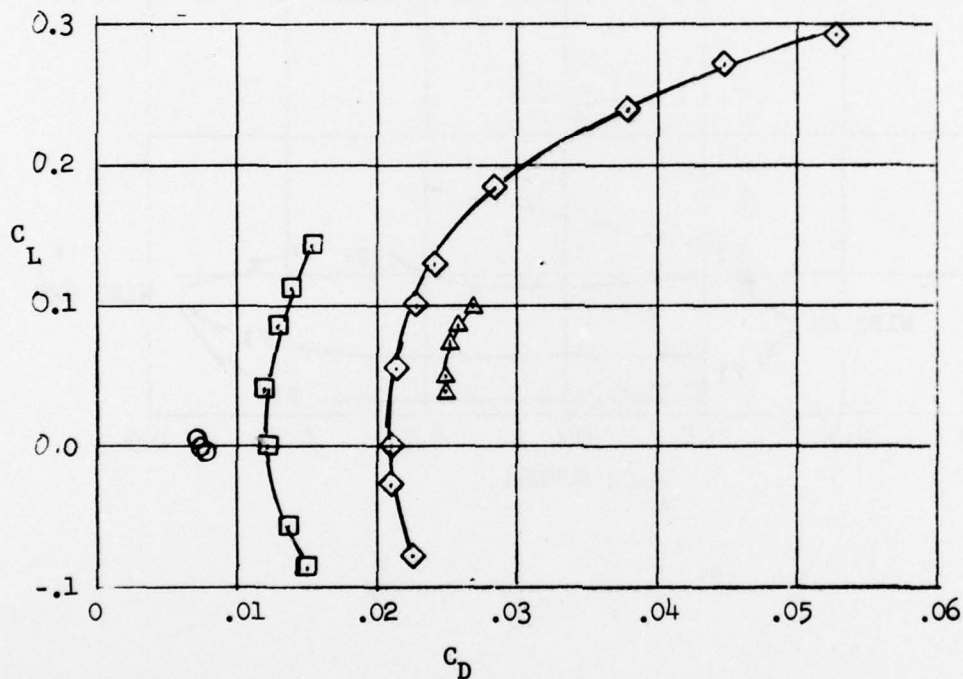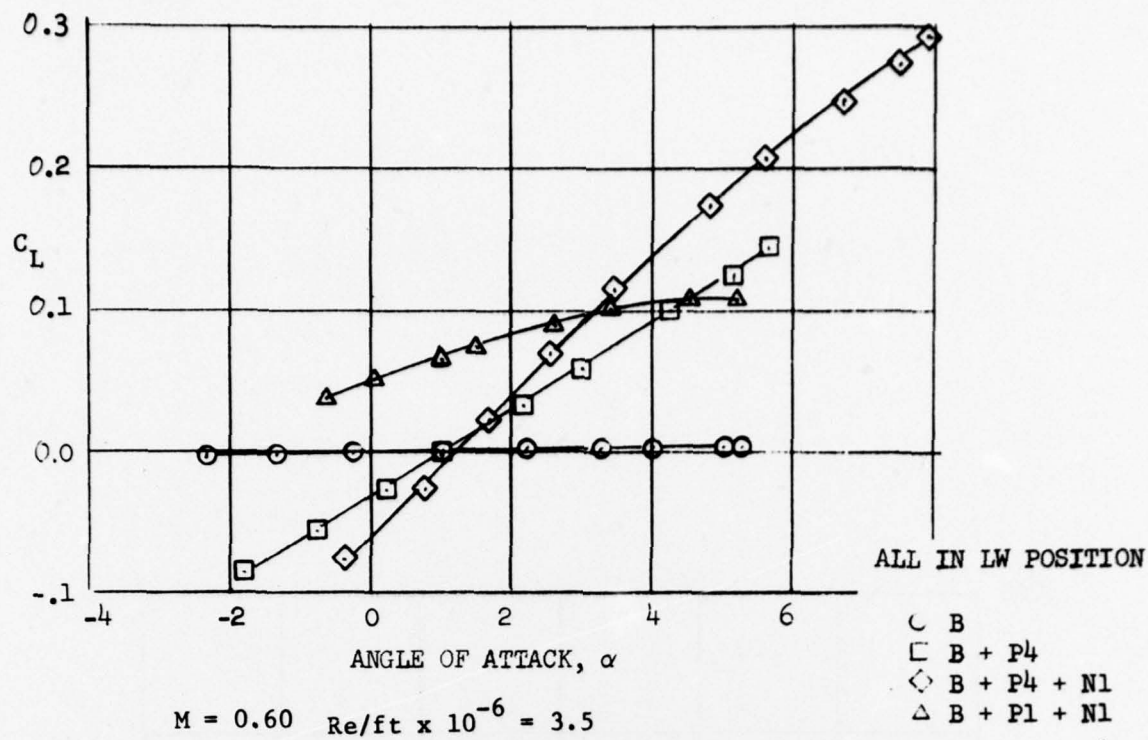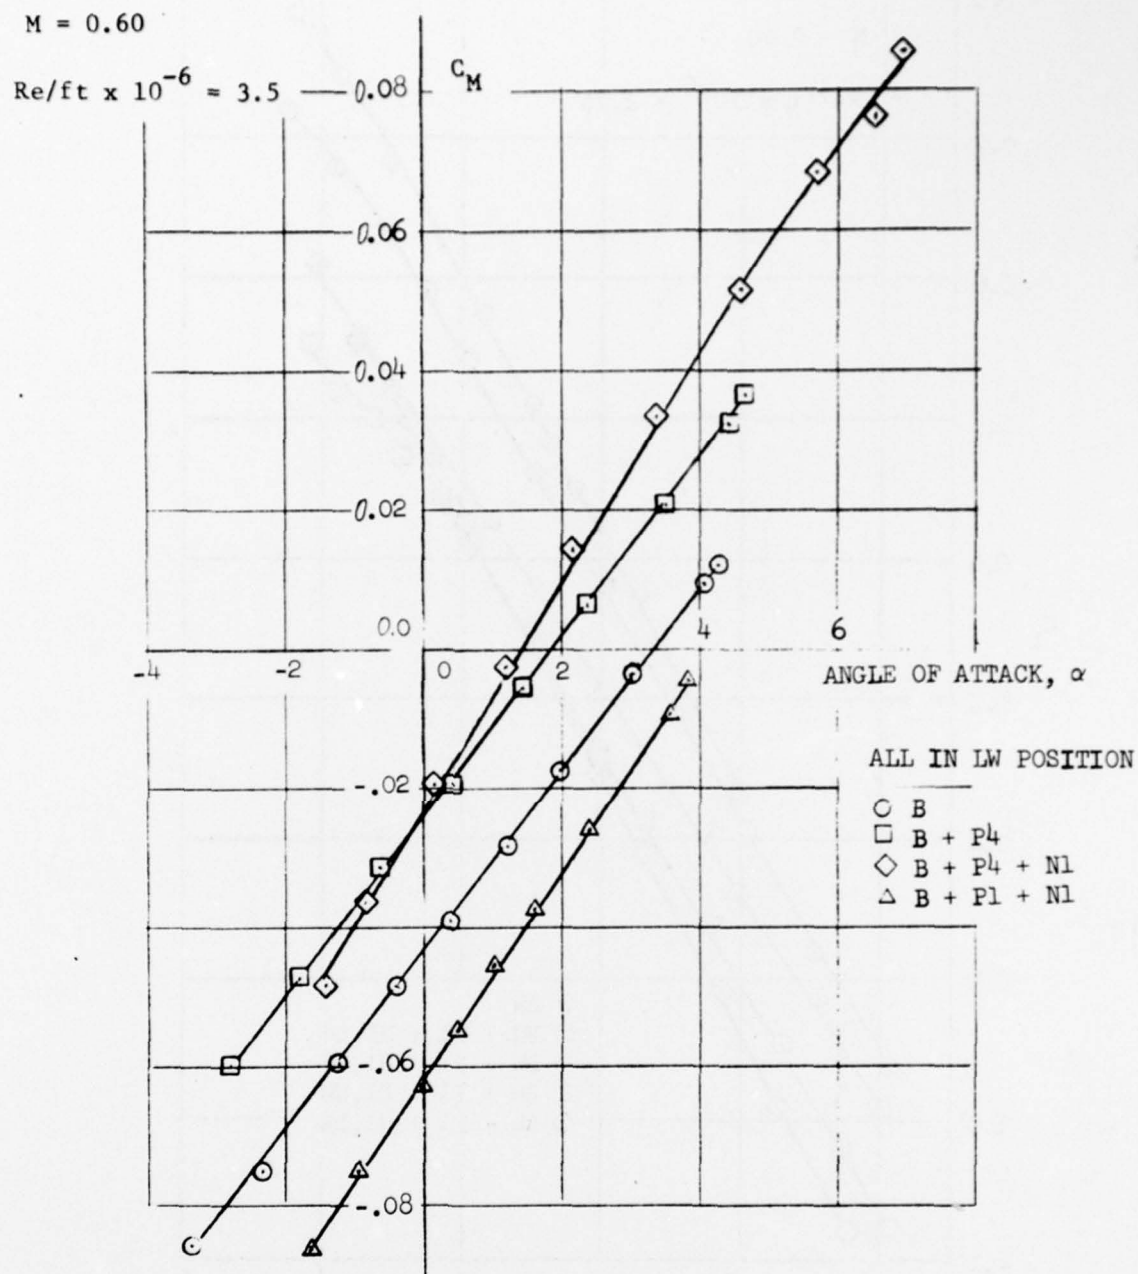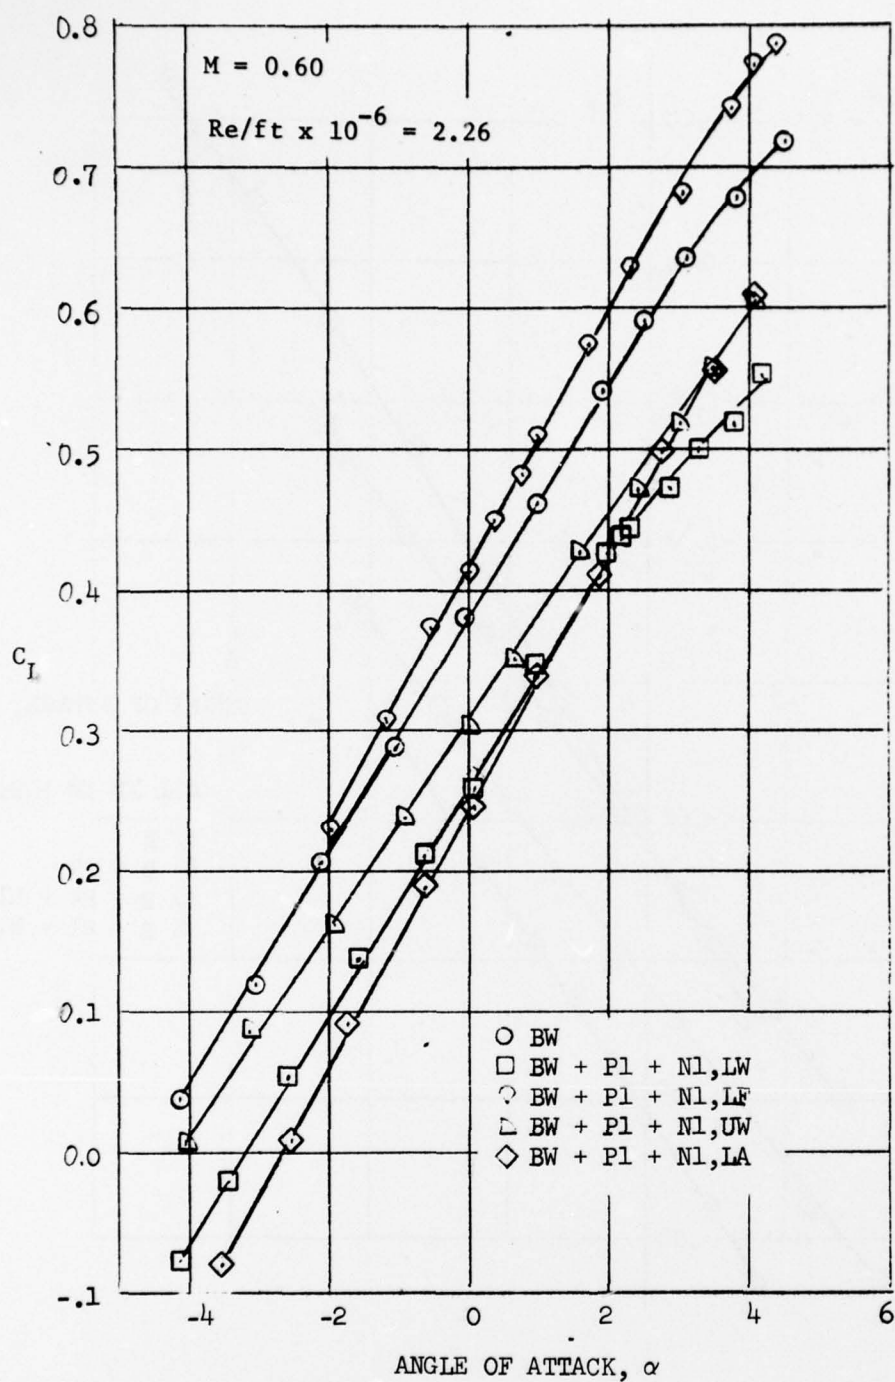| CONF NO.	WING On/Off	PYLON POS.	PYLON SPAN	NACELLE #	CALIBRUN Tot	Stat	.3	.4	.5	.6	.65	.7	.725	.75	.775	.8	.825	.85	COMMENTS
1	Off	L W	4	1	-	-			2	3		4		NACELLE SHAKE					See Note 1
2	"	L W	4	2	-	-			6	7	NACELLE SHAKE								
3	"	L W	4	3	-	-			9/11	10		12	13	NACELLE SHAKE					
4	"	L W	4	5	-	-			15	16		17	18						
5	?	L W	4	4	-	-			20	21									
6	"	L W	4	0	-	-			23	24		25	26						
7	"	BODY ALONE			-	-			28	29		35	34	33	32	31		30	
8	"	L W	1	0	-	-			37	38		44	43	42	41	40		39	
9	"	L W	1	3	-	-			46	47		52	51	50	49	48			
10	"	L W	1	4	-	-			54	55		61	60	59	58	57		56	
11	"	L W	1	1	-	-			63	64		65	66	67	68	69			
12	"	L W	2	1	-	-			71	72		73	74	75	76	77	78		
13	"	U W	1	1	-	-			80	81		82	83	84	85	86	87		See Note 3
14	"	U W	1	1	-	-			89	90		91	92	93	94	95	96		
15	"	L A	1	1	-	-			98	99		100	101	102	103	104	105		
16	"	L F	1	1	-	-			107	108		— MODEL SHAKE							
17	ON	BODY WING			-	-			110	BALANCE OVERLOAD NF									See Note 2
18	OFF	L W	3	1	-	-			113	114		115	116	117	118	119			
18	OFF	L W	3	1	1	-			121	122		123	124	125	126	127	128		
18	OFF	L W	1	4	-	2			129	130		131	132	133	134	135	136		
19	OFF	L W	1	4	-	3			139	140		141	142	143	144	145	146		
19	"	L W	1	4	4	-			147	148		149	150	151/155	152	153	154		
20	"	L W	1	5	5	-			157	158		159	160	161	162	163	164		Rerun of 151

CONF NO.	WING On/Off	PYLON POS.	PYLON SPAN	NACELLE #	CALIBRUN Tot	CALIBRUN Stat	.3	.4	.5	.6	.65	.7	.725	.75	.775	.8	.825	.85	COMMENTS
20	OFF	L W	1	5	–	6			165	166	167	168	169	170	171	172			
21	OFF	BODY ALONE		–	–	–			174	175	176	177	178	179	180	181			
22	"	L W	1	1	–	–			184	185	186	187	188	189	190	191			
23	"	L W	3	0	–	–			193	194	195	196	197	198	199	200			
24	ON	BODY WING		–	–	–			202	203								204	See Note 2
24	"	L W	1	1	–	–			211	210	209	208	207	206	205	204			
25	"	L W	1	1	–	–			217	216	215	214	213						Run 213 M=.67
26	"	U W	1	1	–	–	224	223	222	221	220	219							Run 220 M=.625
27	"	L W	1	1	–	–	235	234	233	232	231	230	229	228	227	226			
28	"	L A	1	1	–	–	241	240	239	238	237								See Note 3
29	"	U W	1	1	–	–	247	246	245	244	243								
30	"	L W	1	2	–	–	253	252	251	250	249								
31	"	L W	1	3	–	–	259	258	257	256	255								
32	"	L F	1	1	–	–	265	264	263	262	261								
24	"	BODY WING		–	–	–	266	267	268										See Note 2
33	"	L F	2	1	–	–	274	273	272	271	270								
34	"	L F	3	1	–	–	280	279	278	277	276								
35	"	L W	1	4	–	–	286	285	284	283	282								
36	"	L A	3	1	–	–	292	291	290	289	288								
37	"	L W	1	5	–	–	298	297	296	295	294								
38	"	L A	2	1	–	–	304	303	302	301	300								
39	"	L W	3	2	–	–	310	309	308	307	306								
40	"	L W	3	1	–	–	316	315	314	313	312								
41	"	U W	3	1	–	–	322	321	320	319	318								

CONF NO.	WING On/Off	PYLON POS.	PYLON SPAN	NACELLE #	CALIBRUN Tot	Stat	.3	.4	.5	.6	.65	.7	.725	.75	.77	.8	.825	.85	COMMENTS
42	ON	L W	2	1	–	–	328	327	326	325	324								
43	"	L W	1	1	–	–	334	333	332	331	330								
44	"	L A	1	2	–	–	340	339	338	337	336								
45	"	L W	3	–	–	–	346	345	344	343	342								
46	OFF	L W	1	1	–	–	357	356	355	354	353	352	351	350	349	348			See Note 1
47	OFF	L W	3	2	–	–	368	367	366	365	364	363	362	361	360	359			
48	"	L W	3	2	–	–	369	370	371	372	373								

Note 1: All wing-off configurations were run at SCV conditions, except for
Runs 348 through 368 which were run evacuated to 1400 psf.

Note 2: All wing-on configurations were run evacuated to 1400 psf, except for
Runs 110,202,203,266,267 and 268 which were run at SCV conditions.

Note 3: These configurations were run with the LA pylon instead of the LW pylon
which brought the nacelles 0.46 in. closer to the fuselage.

SUPPLEMENTARY

INFORMATION

DAVID W. TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CENTER

HEADQUARTERS
BETHESDA, MARYLAND 20084

From: Commander, David W. Taylor Naval Ship R&D Center
To: Distribution List

Subj: DTNSRDC Report ASED-390; forwarding of errata to

Encl: (1)   DD Form 1473 for DTNSRDC ASED-390

1.   DTNSRDC Report ASED-390 has been recently sent under separate cover. Pertinent information was omitted from DD form 1473 and a correct form (enclosure (1)) is forwarded for insertion in the report.

J. H. NICHOLS
By direction

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER DTNSRDC ASED-390	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PARAMETRIC TRANSONIC EVALUATION OF TYPE A VSTOL NACELLE DRAG		5. TYPE OF REPORT & PERIOD COVERED Final (Jan – Aug 1977)
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Jonah Ottensoser		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Aviation and Surface Effects Department David W. Taylor Naval Ship R&D Center Bethesda, Maryland 20084		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Element 63258N Project W0590-SL (Continued on reverse side)
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command Code PMA 269 Washington, D.C. 20361		12. REPORT DATE September 1977
		13. NUMBER OF PAGES 46
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office) Naval Air Systems Command AIR 320, AIR 5301 Washington, D.C. 20361		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION UNLIMITED

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Type A VSTOL
Nacelle Drag
Pylon Drag

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

A parametric evaluation of the zero lift drag characteristics attributable
to the large nacelles found on some Type A VSTOL candidate aircraft was con-
ducted in the 7- by 10-foot transonic wind tunnel of the David W. Taylor Naval
Ship Research and Development Center. Mounting the nacelles in proximity to the
wings and fuselage yields levels of interference drag three to four times the
isolated drag which results in the nacelle interference drag producing approx-
imately 50 percent of the total aircraft drag. Movement of the nacelles away
(Continued on reverse side)

DD FORM 1473 1 JAN 73   EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)